

Dempster Fibre Project Spill Contingency Plan



Photo Credit: Devon Yacura, 2018

Submitted to:

Mackenzie Valley Land and Water Board

P.O. Box 2130
Yellowknife, NT X1A 2P6

Submitted by:

**Government of Yukon
Department of Highways and Public
Works
Property Management Division**
9010 Quartz Rd.
Whitehorse, YT Y1A 2C6

Prepared by:

Hemmera Envirochem Inc.
2237 2nd Avenue, Suite 230
Whitehorse, YT Y1A 0K7
T: 867.456.4865
F: 604.669.0430
hemmera.com

Project No. 103469-01

December 3, 2020

TABLE OF CONTENTS

1.0	PROJECT BACKGROUND.....	1
1.1	Company Name, Location and Mailing Address.....	1
1.2	Effective Date of Spill Contingency Plan	2
1.3	Purpose and Scope.....	2
1.4	Distribution List.....	2
1.5	Additional Copies	2
1.6	List of Revisions	2
1.7	Licences, Permits and Fees.....	2
1.8	Hazardous Materials Stored On-Site	2
1.9	Preventive Measures	3
2.0	RESPONSE ORGANIZATION	4
3.0	ACTION PLAN.....	6
3.1	Potential Spill Sizes and Sources for Hazardous Material On-Site	6
3.2	Potential Environmental Impacts of Spill.....	6
3.2.1	Diesel Fuel	6
3.2.2	Gasoline	7
3.2.3	Propane.....	7
3.2.4	Waste Oil and Miscellaneous Oil/Grease	7
3.3	Procedures for Initial Action	7
3.4	Procedures for Containing and Controlling the Spill (e.g., on land, water, snow, etc.)	7
3.4.1.1	Containment of Spills on Land.....	8
3.4.1.2	Containment of Spills on Open Water	8
3.4.1.3	Containment of Spills on Ice	9
3.4.1.4	Containment of Spills on Snow	10
3.4.1.5	Worst Case Scenarios	11
3.4.1.6	Fire or Explosion	11
3.5	Procedures for Transferring, Storing, and Managing Spill-Related Wastes	11
3.6	Procedures for Restoring Affected Areas, Providing Regulators with Status Updates and Clean-up Completion.....	11
4.0	RESOURCE INVENTORY.....	12
4.1	On-Site Resources.....	12
4.2	Regional Contact Information	12
5.0	TRAINING PROGRAM	13

LIST OF TABLES

Table 1	Estimated Fuel and Fuel Storage Requirements	3
Table 2	List of Hazardous Materials, Potential Discharge Events, Potential Discharge Volumes (worst case scenarios in brackets) and Direction of Potential Discharge	6
Table 3	Off-Site Resource Information	12

LIST OF FIGURES

Figure 1	Flow Chart of Response Organization in the Event of a Spill	5
----------	---	---

LIST OF ATTACHMENTS

Attachment A	Reportable Quantities for NWT Spills
Attachment B	Spill Report Form
Attachment C	Safety Data Sheets

1.0 PROJECT BACKGROUND

The proposed Dempster Fibre Project (DFP) is a Yukon Government-driven project intended to provide a redundancy loop, known as a fibre ring, for 39 terrestrial-served and 36 satellite-served northern communities in BC, Yukon, NWT, and Nunavut. This loop will be completed by running an 800 km length of fibre cable along the Klondike Highway from Dawson City, YT, to the Dempster Highway junction, then north up the Dempster Highway to Inuvik, NWT. The fibre cable will connect to the recently constructed Mackenzie Valley Fibre Link (MVFL) at Inuvik. Once complete, 78% of northern communities will benefit from the redundant loop created by this Project.

The Dempster Highway extends for 735 km from the Dempster Highway junction, 40 km east of Dawson City, to Inuvik, NWT. Other than Inuvik, there are two communities along the Dempster Highway: Fort McPherson and Tsiigehtchic, both located in the NWT. There are two river crossings along the highway at the Peel and Mackenzie Rivers that require ferry crossings during the summer and ice road crossings during the winter. The Peel River is located at Fort McPherson and the Mackenzie River at Tsiigehtchic. The highway is located within a legally defined 60 m-wide right-of-way (ROW). Both the Yukon Government – Department of Highways and Public Works and the Government of Northwest Territories – Department of Infrastructure exercise authority over the operation and maintenance of the Dempster Highway in Yukon and the Northwest Territories, respectively.

To the extent practical, the design specifications for construction of the fibre optic cable and conduit will be installed within the highway ROW but away from the existing highway structure. In some instances, the cable may be required to be installed within the existing highway structure (prism). When this occurs, the design will aim to minimize the risk to the highway structure while taking constructability into consideration as well as life cycle cost and maintainability of the cable.

Due to the variability of conditions encountered along the Dempster Highway, a variety of construction and installation techniques will be employed to successfully install the fibre optic cable including the following:

- Conventional buried cable using heavy equipment to install the conduit and cable at a depth of between 600 mm – 1,000 mm below ground.
- Shallow direct-buried cable using cable plowing techniques in non-frozen conditions.
- Surface-laid cable in sensitive terrain and wetland areas in non-frozen and frozen conditions.
- Horizontal Directional Drilling (HDD) of fish-bearing streams, rivers, other waterbodies and challenging sections.
- Aerial cable installation in selected sensitive or challenging construction areas.
- Aerial cable installation along Yukon Energy Transmission Line poles for approximately 28 km adjacent to the Klondike Highway and over Australia Hill.

1.1 Company Name, Location and Mailing Address

Yukon Government
Highways and Public Works
P.O. Box 2703 (W-5)
Whitehorse, YT Y1A 2C6
Main Contact: Darryl Froese – Project Manager
Phone: (867) 667-3089
Email: Darryl.froese@gov.yk.ca

1.2 Effective Date of Spill Contingency Plan

The Spill Contingency Plan will be in effect for the duration of the Project for all phases including construction, operation and maintenance. The plan will be in effect from the date of issue of the permit and will expire on the date that the permit is closed.

1.3 Purpose and Scope

The purpose of this plan is to outline response actions for potential spills of any size, including a worst-case scenario for Yukon Government (YG) and their contractor(s) at the work site. The plan identifies key response personnel and their roles and responsibilities in the event of a spill, as well as the equipment and other resources available to respond to a spill. The plan also details spill response procedures that will minimize potential health and safety hazards, environmental damage, and clean-up efforts. The plan has been prepared to ensure quick access to all the information required in responding to a spill.

1.4 Distribution List

This plan and the most recent revisions will be distributed to all staff and contractors working on the Project. The Plan will be presented and reviewed during a tailgate meeting prior to the start of construction. The Spill Contingency Plan will be included as part of new staff orientation activities.

1.5 Additional Copies

Several copies of the plan are to be kept on site at all times. A copy is also to be held at the YG office in Whitehorse and with the Mackenzie Land and Water Board. Additional copies of the plan can be obtained by contacting YG directly at the phone number or email presented in Section 1.1.

1.6 List of Revisions

Any revisions to the plan will be submitted to the Mackenzie Land and Water Board for approval and regulating agencies prior to implementing any changes.

1.7 Licences, Permits and Fees

All fuels and hazardous wastes related to the construction, operation and maintenance of the DFP will be handled, stored and disposed of in accordance with this Plan and all applicable federal, territorial, and municipal laws and regulations. YG and its contractor(s) will be responsible for any required fees, licences, and permits.

1.8 Hazardous Materials Stored On-Site

The construction phase will require the use of diesel and gasoline fuel for mobile equipment and camp facilities. All fuel needed for the Project will be supplied by standard fuel trucks and distributed as needed with pick-up trucks equipped with tidy tanks. Estimated fuel type and storage locations are shown in **Table 1**. A final list of fuel and storage requirements can be provided once the contractor is hired and prior to construction.

Diesel will be used for the majority of fueling. Gasoline will be used to fuel pick-up trucks and potentially for generators at the camps. Propane will be used for heating at the camps.

Table 1 Estimated Fuel and Fuel Storage Requirements

Fuel Type and Location	Containment Requirements (L)	Containment Type	Amount	Secondary Containment
Diesel p-50 (ULSDF): at staging areas	3,400	Double-walled fuel tank	2	Secondary tank and/or external secondary containment area
Diesel p-50 (ULSDF) at staging areas:	2,250	Double-walled fuel tank	2	Double-walled and/or external secondary containment
Diesel drums on trucks	235	Double-walled fuel tank	4	Secondary tank and/or external secondary containment area
Diesel drums at staging areas	235	New steel drums	20	Steel or polyurethane tub designed to hold 110% of the total volume and/or secondary containment area.
Gasoline (mid-grade) at staging areas	235	New steel drums	4	Steel or polyurethane tub designed to hold 110% of the total volume and/or secondary containment area.
Oils and Grease at staging areas	22	Polyurethane pail	20	Steel or polyurethane tub designed to hold 110% of the total volume stored.
Propane at camps	375	Propane Cylinder	10	n/a

1.9 Preventive Measures

Along with the preventative measures outlined below, adequate training of all staff and contractors is paramount. Site specific spill prevention and spill response measures are to be discussed as part of the health and safety meetings to be held at the beginning of each field day.

Spill kits will be located wherever fuel is stored or used on-site. See **Section 4** for details on spill kit contents. Portable drip trays and appropriately sized fuel transfer hoses with pumps are to be used when refueling vehicles and equipment to avoid any leaks/drips onto the land. In order to prevent spill occurrences, the following spill prevention measures and general precautions are to be employed at the various installation sites:

- Truck and equipment inspections should be performed on a regular basis (i.e., daily);
- Leak checks should be performed for motorized vehicles and other equipment on a regular basis throughout the term of the installation activities;
- Spill containment equipment should be inspected prior to use and regularly thereafter;
- Secondary containment measures should be in place at required locations;
- Personal protective equipment (PPE) should be worn at all times when handling hazardous materials;
- SDS should be readily available for all hazardous materials present on-site;
- Spill kits should be readily available for fuel/oil spills; and
- Inspection checklists should be prepared and followed by appropriate personnel.

2.0 RESPONSE ORGANIZATION

The flow chart depicted in **Figure 1** below identifies the response organization, and when applicable, their alternates, as well as the chain of command for responding to a spill or release. The duties of various response personnel are summarized, contact information is provided in **Section 4.2** (including 24-hour phone numbers).

An immediately reportable spill is defined as a release of a substance that is likely to be an imminent environmental or human health hazard or meets or exceeds the volumes outlined in **Attachment A**. It will be reported to the NT 24-Hour Spill Report Line at (867) 920-8130. Any spills less than these quantities do not need to be reported immediately to the spill reporting line. Rather, these minor spills will be tracked and documented by YG and their contractor(s) and submitted to the appropriate authority either immediately upon request or at a pre-determined reporting interval. If there is any doubt that the quantity spilled exceeds reportable levels, the spill will be reported to the NT 24-Hour Spill Report Line.

In the event of a spill involving danger to human life, satellite phones or cell phones will be used to contact emergency response personnel in Inuvik, Dawson City or Whitehorse. The spill will be immediately reported by personnel to YG, and the NT 24-hour Spill Report Line.

Reportable quantities for hazardous spills are provided in **Schedule 1** and defined on the NT Hazardous Spills Database Website: <http://www.enr.gov.nt.ca/services/spills/reporting-spills>.

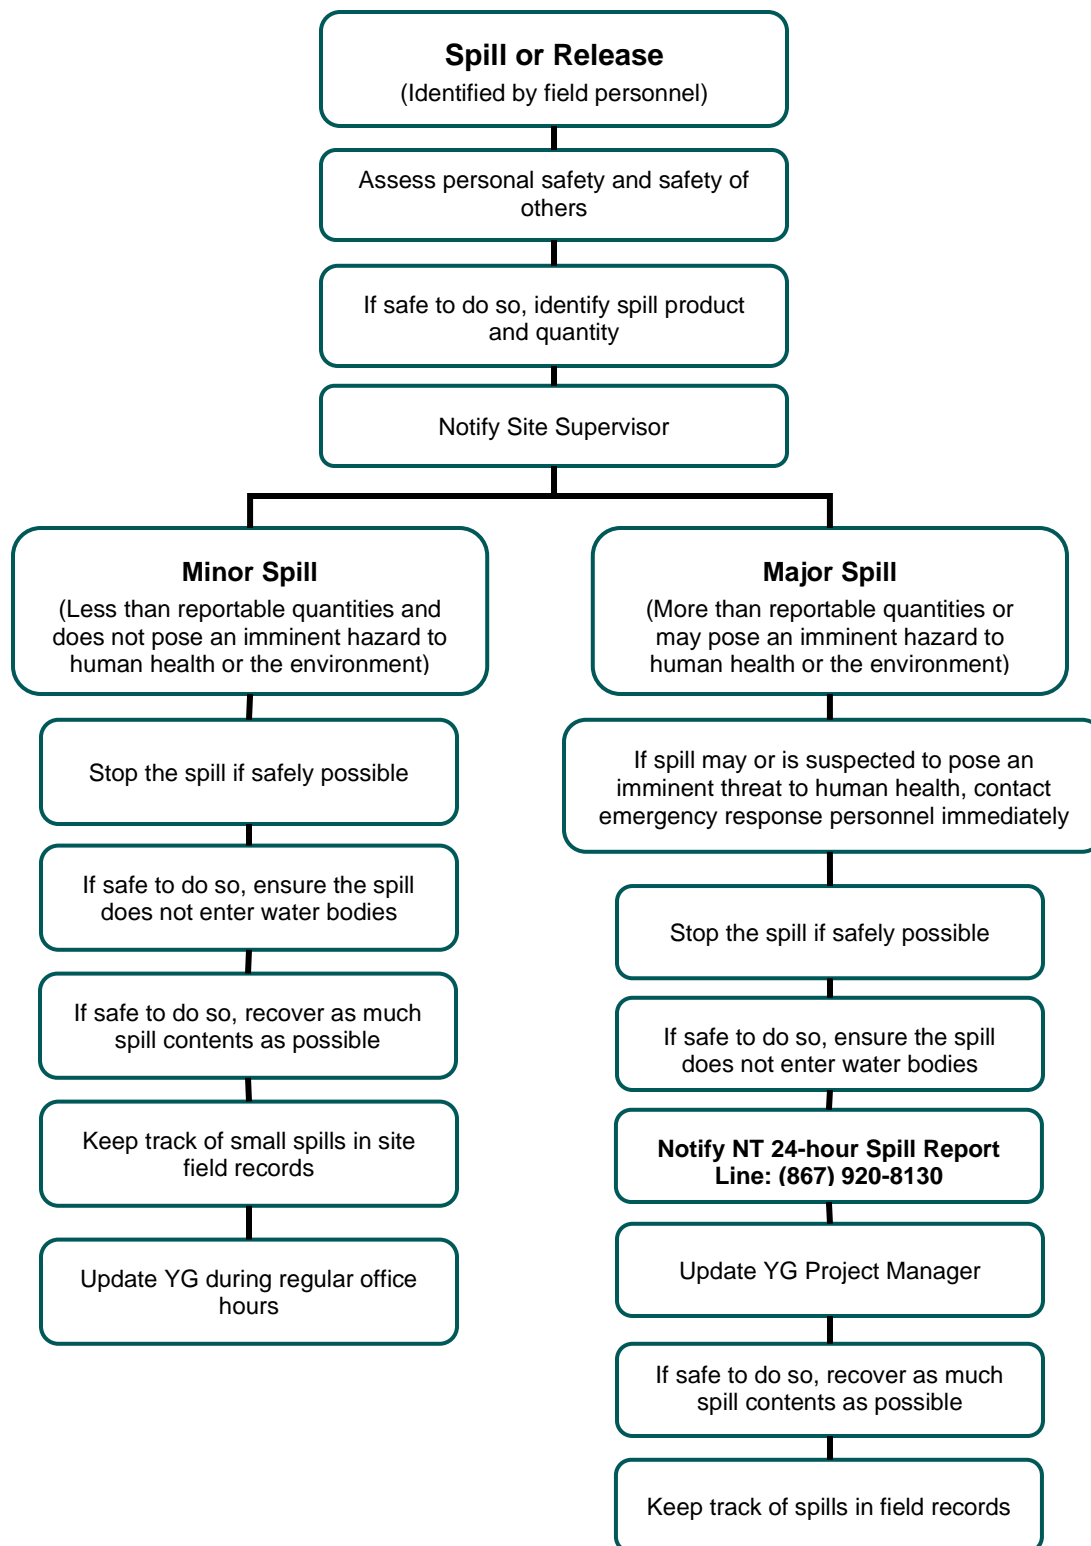


Figure 1 Flow Chart of Response Organization in the Event of a Spill

3.0 ACTION PLAN

3.1 Potential Spill Sizes and Sources for Hazardous Material On-Site

In **Table 2**, a list of potential discharge events, with associated discharge volumes and directions is presented for the primary hazardous materials stored on site. The most likely discharge volume is indicated and the spill clean up procedures will focus on spills of this quantity. A worst-case scenario is also presented. Specific discharge rates are not indicated for each fuel type as these would vary from a few minutes to several hours, based on the source of leak or puncture.

Table 2 List of Hazardous Materials, Potential Discharge Events, Potential Discharge Volumes (worst case scenarios in brackets) and Direction of Potential Discharge

Material (sources)	Potential Discharge Event	Discharge Volume (worst case)	Direction of Potential Discharge
Diesel Fuel (trucks, equipment)	1) Over pumping of fuel from fuel truck into equipment 2) Leaking from equipment 3) Fuel service truck accident	Likely under 1 L (Maximum 43,000 L, assuming the largest available fuel service truck)	Based on local topography, it is likely that petroleum hydrocarbons discharged into the environment would pool in low lying areas in the vicinity of the refueling truck.
Gasoline (trucks, ATVs, snow machines)	1) Leaking from equipment	Likely under 1 L (Maximum 75 L)	Based on local topography, it is likely that petroleum hydrocarbons discharged into the environment would pool in low lying areas in the vicinity of the refueling truck.
Propane (storage container)	1) Leaking from storage container	Likely under 1 L (Maximum 375 L)	It is likely that propane will discharge into the air and should dissipate immediately.
Engine Oil (trucks and equipment)	1) Overfilling vehicle storage tanks. 2) Leaking from vehicles.	Likely under 1 L (Maximum 4 L)	Based on local topography, it is likely that engine oil discharged into the environment would pool in low lying areas in the vicinity of the vehicle where it leaked from.

3.2 Potential Environmental Impacts of Spill

For all hazardous materials discussed below, impacts are lower during winter as snow is a natural sorbent and ice forms a barrier limiting or eliminating soil or water contamination. Spills can be more readily recovered when identified and reported.

Safety Data Sheets for each of the hazardous materials below is provided in **Attachment C**.

3.2.1 Diesel Fuel

Environmental impacts: Diesel may be harmful to wildlife and aquatic life. It is not readily biodegradable and has the potential for bioaccumulation in the environment. Diesel burns slowly and thus risk to the

environment is reduced during recovery as burn can be more readily contained compared with volatile fuels. Runoff into water bodies must be avoided.

Worst case scenario: All fuel drums were punctured or open simultaneously and contents seeped into surrounding soil and water bodies. This could cause illness or death to aquatic life and indirectly affect wildlife feeding from the land and water.

3.2.2 Gasoline

Environmental impacts: Gasoline may be harmful to wildlife and aquatic life. It is not readily biodegradable and has the potential for bioaccumulation in the environment. Gasoline is quick to volatilize. Runoff into water bodies must be avoided.

Worst case scenario: All fuel drums were punctured or open simultaneously and contents seeped into surrounding soil and water bodies. This could cause illness or death to aquatic life and indirectly affect wildlife feeding from the land and water.

3.2.3 Propane

Environmental impacts: None

3.2.4 Waste Oil and Miscellaneous Oil/Grease

Environmental impacts: Waste oils may be harmful to wildlife and aquatic life. It is not readily biodegradable and has the potential for bioaccumulation in the environment. Runoff into water bodies must be avoided.

Worst case scenario: All storage drums were punctured or open simultaneously and contents seeped into surrounding soil and water bodies. This could cause illness or death to aquatic life and indirectly affect wildlife feeding from the land and water.

3.3 Procedures for Initial Action

1. Be alert and consider your personal safety first.
2. Assess the hazard to persons in the vicinity of the spill and where possible, take action to control danger to human life (ensure safety for everyone).
3. Assess the situations and make arrangements for first aid and removal of injured personnel.

3.4 Procedures for Containing and Controlling the Spill (e.g., on land, water, snow, etc.)

If safe to do so, follow these steps:

1. Initiate spill containment by first determining what will be affected by the spill.
2. Assess speed and direction of spill and cause of movement (water, wind and slope).
3. Determine best location for containing spill, avoiding any waterbodies.
4. Have a contingency plan ready in case spill worsens beyond control or if the weather or topography impedes containment.

3.4.1.1 *Containment of Spills on Land*

Spills on land include spills on rock, gravel, soil and/or vegetation. It is important to note that soil is a natural sorbent; thus, spills on soil are generally less serious than spills on water as contaminated soil can be more easily recovered. Generally, spills on land occur during the late spring, summer or fall when snow cover is at a minimum. It is important that all measures be undertaken to avoid spills reaching open water bodies.

1. In the event of a spill, any person who found it should report this to the Site Supervisor.
2. The Site Supervisor should, upon notification, determine the source, the extent and size of the spill. The Site Supervisor is responsible to take the appropriate action and alert the necessary people.
3. Use the reporting procedures to notify the proper authorities.
4. If the area in which the spill occurred is accessible to the public or domestic pets, the contaminated area must be clearly marked or cordoned off to restrict access. Keep children and interested bystanders away from cleanup activities.
5. Protective clothing (at a minimum, rubber or latex gloves, safety goggles and rubber boots) should be worn when cleaning up a spill. (Dispose of gloves and wash rubber boots and safety goggles when leaving spill site)
6. Assess speed and direction of spill.
7. Determine best location for containing spill.
8. In all cases of liquid spills, the initial containment step is to prevent further dispersion. This is done with cut-off ditches and dyking with soil as needed around the spill utilizing mobile heavy equipment. If necessary, absorbents (e.g., Zorbal, Hazorb Pillows, peat moss, sawdust) or gelling agents (e.g., Chemgel) should be spread to prevent further spread or seepage.
9. Dykes can be created using soil surrounding a spill on land. These dykes are constructed around the perimeter or down slope of the spilled fuel. A dyke needs to be built up to a size that will ensure containment of the maximum quantity of fuel that may reach it. Fuels that pool up can be removed with sorbent materials or by pump (be sure to use a proper hose and pump rated for the specific contaminant) into barrels. If the spill is migrating very slowly a dyke may not be necessary and sorbents can be used to soak up fuels before they migrate away from the source of the spill.
10. If you cannot build a dyke, trenches can be dug out to contain spills as long as the top layer of soil is thawed. Shovels, pick axes or a loader can be used depending on the size of trench required. It is recommended that the trench be dug to the bedrock or permafrost, which will then provide containment layer for the spilled fuel. Fuel can then be recovered using a pump (be sure to use a proper hose and pump rated for the specific contaminant) or sorbent materials. Once the soil has been removed, it should be replaced with clean soil to avoid slumping.

3.4.1.2 *Containment of Spills on Open Water*

Spills on water such as rivers, streams or lakes are the most serious types of spills as they can negatively impact water quality and aquatic life. All measures need to be undertaken to contain spills on open water.

For spills in open water, containment procedures will vary depending on whether the material floats or sinks, and whether the water is flowing or standing.

1. In the event of a spill, any person who found it should report this to the Site Supervisor.
2. The Site Supervisor should, upon notification, determine the source, the extent and size of the spill. Therefore, the Site Supervisor is responsible to take the appropriate action and use the reporting procedures to notify the proper authorities.

3. If the area in which the spill occurred is accessible to the public or domestic pets, the contaminated area must be clearly marked or cordoned off to restrict access. Keep children and interested bystanders away from cleanup activities.
4. Protective clothing (at a minimum, rubber or latex gloves, safety goggles and rubber boots) should be worn when cleaning up a spill. (Dispose of gloves and wash rubber boots and safety goggles when leaving spill site)
5. Assess speed and direction of spill.
6. Determine best location for containing spills.
7. For floating materials, a surface boom shall be deployed. Booms are commonly used to recover fuel floating on the surface of a lake or slow-moving streams. They are released from the shore of a water body to create a circle around the spill. If the spill is away from the shoreline, a boat will need to be used to reach the spill and the boom can be set out. More than one boom may be used at once. Booms may also be used in streams and should be set out at an angle to the current. Booms are designed to float and some have sorbent materials built into them to absorb fuels at the edge of the boom. Fuel contained within the circle of the boom will need to be recovered using sorbent materials or pumps (be sure to use a proper hose and pump rated for the specific type of contaminant) and placed into barrels for disposal. If a boom cannot be installed, weirs may be constructed, especially in shallow areas.
8. Weirs can be used to contain spills in streams and to prevent further migration downstream. Plywood or other materials found on-site can be placed into and across the width of the stream, such that water can still flow under the weir. Spilled fuel will float on the water surface and be contained at the foot of the weir. It can then be removed using sorbents, booms or pumps (be sure to use a proper hose and pump rated for the specific contaminant) and placed into barrels.
9. The Site Supervisor will have to judge whether the impact of the spill will be most reduced by carrying out a containment procedure or by immediately attempting to remove any contaminant from the water. This will depend on the equipment available and how long it will take for additional equipment to arrive. Removed contaminants should be placed on an impermeable contained surface (example poly liner in a depression) or an overpack drum to prevent further seepage.

3.4.1.3 *Containment of Spills on Ice*

Spills on ice are generally the easiest spills to contain due to the predominantly impermeable nature of the ice. For spills on ice, containment procedures will vary depending on whether the material stays on the ice or sinks into it.

1. In the event of a spill, any person who found it should report this to the Site Supervisor.
2. The Site Supervisor should, upon notification, determine the source, the extent and size of the spill. The Site Supervisor is responsible to take the appropriate action and alert the necessary people.
3. Use the reporting procedures to notify the proper authorities.
4. If the area in which the spill occurred is accessible to the public or domestic pets, the contaminated area must be clearly marked or cordoned off to restrict access. Keep children and interested bystanders away from cleanup activities.
5. Protective clothing (at a minimum, rubber or latex gloves, safety goggles and rubber boots) should be worn when cleaning up a spill. (Dispose of gloves and wash rubber boots and safety goggles when leaving spill site)

6. Assess speed and direction of spill.
7. Determine best location for containing spill.
8. Spills on ice can be affected by the strength of the ice and the floating or sinking characteristics of the materials. The safe bearing capacity of ice must be carefully assessed.
9. If the spill does not penetrate the ice, and the ice is safe to work on, sorbent materials can be used to soak up spilled fuel. Remaining contaminated ice/slush can be scraped and shoveled into a barrel. However, all possible attempts should be made to prevent spills from entering ice covered waters as no easy method exists for containment and recovery of spills if they seep under ice.
10. If the spill penetrates the ice, dykes can be used to contain fuel spills on ice. By collecting surrounding snow, compacting it, mounding it and watering it down to form a dyke down slope of the spill, a barrier is created thus helping to contain the spill. The collected fuel can then be pumped (be sure to use a proper hose and pump rated for the specific contaminant) into barrels or collected with sorbent materials.
11. For significant spills on ice, trenches can be cut into the ice surrounding and/or down slope of the spill such that fuel is allowed to pool in the trench. It can then be removed via pump (be sure to use a proper hose and pump rated for the specific contaminant) into barrels, collected with sorbent materials, or mixed with snow and shoveled into barrels.

3.4.1.4 *Containment of Spills on Snow*

Snow is a natural sorbent; thus, as with spills on soil, spilled contents can be more easily recovered. Therefore, snow should be used as much as possible when it is available.

1. In the event of a spill, any person who found it should report this to the Site Supervisor.
2. The Site Supervisor should, upon notification, determine the source, the extent and size of the spill. The Site Supervisor is responsible to take the appropriate action and alert the necessary people.
3. Use the reporting procedures to notify the proper authorities.
4. If the area in which the spill occurred is accessible to the public or domestic pets, the contaminated area must be clearly marked or cordoned off to restrict access. Keep children and interested bystanders away from cleanup activities.
5. Protective clothing (at a minimum, rubber or latex gloves, safety goggles and rubber boots) should be worn when cleaning up a spill. (Dispose of gloves and wash rubber boots and safety goggles when leaving spill site)
6. Assess speed and direction of spill.
7. Determine best location for containing spill.
8. Small spills on snow can be easily cleaned up by raking and shoveling the contaminated snow into empty barrels, and storing these at an approved location.
9. Dykes can also be used to contain fuel spills on snow. By compacting snow down slope from the spill, mounding it to form a dyke and watering it down, a barrier is created thus helping to contain the spill. The collected fuel/snow mixture can then be shoveled into barrels, or collected with sorbent materials.

3.4.1.5 Worst Case Scenarios

Dealing with spilled fuel which exceeds the freeboard of a dyke or barrier would present a possible worst-case scenario. To contain the overflow, a trench or collection pit would have to be created downstream of the spill to contain the overflow. Another worst-case scenario would be an excessive spill on water that may be difficult to contain with the booms present at the site. In this case, an emergency response mobile unit would need to be called in to deal with the spill using appropriate equipment.

3.4.1.6 Fire or Explosion

1. In all cases, the first step is to clear people from the surrounding area. Particular care must be taken to prevent inhalation of vapors that are products of combustion.
2. When fire is associated with a spill of hazardous material, the local fire department must be the first responder to fire and explosion occurrence.
3. The fire department will take all the necessary measures to extinguish the fire.
4. If necessary, the fire department will construct dykes down slope from liquid spills, to minimize spreading of fire and contain unburned fluid. Foam, CO₂ or water will then be used as appropriate for the fire.

3.5 Procedures for Transferring, Storing, and Managing Spill-Related Wastes

In most cases, spill cleanups are initiated at the far end of the spill and contained moving toward the source of the spill. Sorbent socks and pads are generally used for small spill clean up. A pump with attached fuel transfer hose can suction spills from leaking containers or large accumulations on land or ice and direct these larger quantities into empty drums. Be sure to use a proper hose and pump rated for the specific fuel/contaminant. Hand tools such as cans, shovels, and rakes are also very effective for small spills or hard to reach areas. Heavy equipment can be used if deemed necessary, and given space and time constraints.

Used sorbent materials are to be placed in barrels for future disposal; this material will be disposed of and cleaned up in accordance with the Waste Management Plan developed for this Project. All materials mentioned in this section are to be available in the spill kits that will be located at each site. Following clean up, any tools or equipment used will be properly washed and decontaminated, or replaced if this is not possible.

For most of the containment procedures outlined in **Section 3.4**, spilled petroleum products and materials used for containment will be placed into containers such as empty waste oil/fuel containers and sealed for proper disposal at an approved disposal facility.

3.6 Procedures for Restoring Affected Areas, Providing Regulators with Status Updates and Clean-up Completion

Once a spill of reportable size has been contained, YG will consult with the appropriate regulatory authorities to determine the level of clean-up required. The regulator may require a site-specific study to ensure appropriate clean up levels are met. Criteria that may be considered include natural biodegradation of oil, replacement of soil, and re-vegetation.

4.0 RESOURCE INVENTORY

4.1 On-Site Resources

Spill kits are to be available at site. The proposed content of the spill kit is described below.

Proposed Content of Spill Kit

- 30 socks/booms (3" X 4")
- 30 pillows (2 L)
- 24 dispersal bags
- 4 pairs gloves
- 2 boxes of disposable gloves (latex nitrile)
- 2 pairs goggles
- 2 pairs Tyvek coveralls
- 4 shovels
- 2 spill signs
- 1 waste containment drum

This response kit should be designed to contain and collect up to 200 L of spilled fuel. If larger volumes need to be accommodated, additional spill response personnel will be contacted.

4.2 Regional Contact Information

Table 3 Regional Contact Information

Organization	Location/Contact	Number
NWT - 24 Hour Spill Report Line	Department of Environment and Natural Resources Government of the Northwest Territories	(867) 920-8130*
YT – 24 Hour Spill Report Line*	Environment Yukon Spill Report Centre	867.667.7244
Yukon Government	Darryl Froese	(867) 667-3089
Inuvik Fire Marshal Office	Emergency Number	(867) 777-2222*
Fort McPherson Fire Department	Emergency Number	(867) 952-2222
Tsiigehtchic Fire Department	Emergency Number	(867) 953-2222
RCMP	Emergency Number	(867) 777-1111
Indigenous and Northern Affairs (INAC) NWT Region	Regional Office	(867) 777-8000

* 24-hour phone line

5.0 TRAINING PROGRAM

Orientation sessions will be held prior to beginning work at each site. These sessions will review:

- The location of the Spill Contingency Plan
- An overview of the Spill Contingency Plan
- The hazards of the materials stored-on site
- The location of spill kits on site, spill kit contents, and their use
- Procedure for containing spills
- Muster points
- Off-site resources

ATTACHMENT A

Reportable Quantities for NWT Spills

Appendix A
Schedule 1 – Reportable Quantities for NT-NU Spills

Substance	Reportable Quantity	TDG Class
Explosives	Any amount	1.0
Compressed gas (toxic/corrosive)		2.3/2.4
Infectious substances		6.2
Sewage and wastewater (unless otherwise authorized)		6.2
Radioactive materials		7.0
Unknown substance		None
Compressed gas (Flammable)	Any amount of gas from containers with a capacity greater than 100 L	2.1
Compressed gas (Non-corrosive, non-flammable)		2.2
Flammable liquid	≥ 100 L	3.1/3.2/3.3
Flammable solid	≥ 25 kg	4.1
Substances liable to spontaneous combustion		4.2
Water reactant substances		4.3
Oxidizing substances	≥ 50 L or 50 kg	5.1
Organic peroxides	≥ 1 L or 1 kg	5.2
Environmentally hazardous substances intended for disposal		9.0
Toxic substances	≥ 5 L or 5 kg	6.1
Corrosive substances		8.0
Miscellaneous products, substances or organisms		9.0
PCB mixtures of 5 or more parts per million	≥ 0.5 L or 0.5 kg	9.0
Other contaminants, e.g. crude oil, drilling fluid, produced water, waste or spent chemicals, used or waste oil, vehicle fluids, wastewater, etc.	≥ 100 L or 100 kg	None
Sour natural gas (i.e., contains H ₂ S)	Uncontrolled release or sustained flow of 10 minutes or more	None
Sweet natural gas		
Flammable liquid	≥ 20 L	3.1/3.2/3.3
Vehicle fluids	When released on a frozen water body that is being used as a working surface	None
Reported releases or potential releases of any size that: 1. Are near or in an open water body; 2. Are near or in a designated sensitive environment or habitat; 3. Pose an imminent threat to human health or safety; or 4. Pose an imminent threat to a listed species at risk or its critical habitat	Any amount	None

Note: L = litre; kg = kilogram; PCB = Polychlorinated Biphenyls; ppm = parts per million

ATTACHMENT B
Spill Report Form

NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

NT-NU 24-HOUR SPILL REPORT LINE

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca



REPORT LINE USE ONLY

A	REPORT DATE: MONTH – DAY – YEAR		REPORT TIME		<input type="checkbox"/> ORIGINAL SPILL REPORT, OR <input type="checkbox"/> UPDATE #	REPORT NUMBER -	
	OCCURRENCE DATE: MONTH – DAY – YEAR		OCCURRENCE TIME				
C	LAND USE PERMIT NUMBER (IF APPLICABLE)			WATER LICENCE NUMBER (IF APPLICABLE)			
D	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM THE NAMED LOCATION				REGION <input type="checkbox"/> NT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT		
E	LATITUDE DEGREES MINUTES SECONDS			LONGITUDE DEGREES MINUTES SECONDS			
F	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION				
G	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION				
H	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER		
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER		
I	SPILL SOURCE		SPILL CAUSE		AREA OF CONTAMINATION IN SQUARE METRES		
J	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED		HAZARDS TO PERSONS, PROPERTY OR ENVIRONMENT		
K	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS						
L	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE		
M	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE		
REPORT LINE <input type="checkbox"/> U <input type="checkbox"/> E ONLY							
N	RECEIVED AT SPILL LINE BY	POSITION Station operator	EMPLOYER	LOCATION CALLED Yellowknife, NT	REPORT LINE NUMBER (867) 920-8130		
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG/TCMSS <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> AANDC <input type="checkbox"/> NEB <input type="checkbox"/> OTHER: _____			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED		
AGENCY		CONTACT NAME	CONTACT TIME	REMARKS			
LEAD AGENCY							
FIRST SUPPORT AGENCY							
SECOND SUPPORT AGENCY							
THIRD SUPPORT AGENCY							

ATTACHMENT C

Safety Data Sheets

SDS ID No.: AM USA-9001

Safety Data Sheet (SDS)

Facilities: All locations

Section 1 – Identification

1(a) Product Identifier used on Label: Used Oil

1(b) Other means of identification: Lubricating oils, spent; Used lubricating oils; Waste lubricating oils; Waste motor oils

1(c) Recommended use of the chemical and restrictions on use: None

1(d) Name, address, and telephone number:

ArcelorMittal USA LLC

Phone number: 219-787-4901 or

1 South Dearborn Street

email at: msdssupport@arcelormittal.com


Chicago, IL 60603-9888

1(e) Emergency phone number: 1-760-476-3962 (Verisk 3E Company Code: 333211) or CHEMTREC (Day or Night): 1-800-424-9300

Section 2 – Hazard(s) Identification

2(a) Classification of the Chemical: Used Oil is considered a hazardous material according to the criteria specified in REACH [REGULATION (EC) No 1907/2006] and CLP [REGULATION (EC) No 1272/2008] and OSHA 29 CFR 1910.1200 Hazard Communication Standard. The categories of Health Hazards as defined in “GLOBALLY HARMONIZED SYSTEM OF CLASSIFICATION AND LABELLING OF CHEMICALS (GHS), Third revised edition ST/SG/AC.10/30/Rev. 3” United Nations, New York and Geneva, 2009 have been evaluated. Refer to Section 3, 8 and 11 for additional information.

2(b) Signal word, hazard statement(s), symbols and precautionary statement(s):

Hazard Symbol	Hazard Classification	Signal Word	Hazard Statement(s)
	Aspiration Hazard 1	DANGER	May be fatal if swallowed and enters airways.

Precautionary Statement(s):

Prevention	Response	Storage/Disposal
N/A	If swallowed: Immediately call a poison center or doctor/physician. Do NOT induce vomiting.	Store locked up. Dispose of contents in accordance with federal, state and local regulations.

2(c) Hazards not otherwise classified: None Known

2(d) Unknown acute toxicity statement (mixture): None Known

Section 3 – Composition/Information on Ingredients

3(a-c) Chemical name, common name (synonyms), CAS number and other identifiers, and concentration:

Chemical Name	CAS Number	EC Number	% weight
Lubricating Oils, Used	70514-12-4	274-635-9	60-100
Water	7732-18-5	231-791-2	0-40

EC - European Community

CAS - Chemical Abstract Service

Section 4 – First-aid Measures

4(a) Description of necessary measures: If exposed, concerned or feel unwell: Get medical advice/attention, call a poison center or doctor/physician.

- **Inhalation:** If inhaled: Remove person to fresh air and keep comfortable for breathing.
- **Eye Contact:** If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
- **Skin Contact:** If on skin: Wash with plenty of water. If skin irritation or rash occurs: Get medical advice/attention.
- **Ingestion:** If swallowed: Immediately call a poison center or doctor/physician. Do NOT induce vomiting.

4(b) Most important symptoms/effects, acute and delayed (chronic):
Acute Effects:

- **Inhalation:** Acute respiratory effects caused by overexposure may include coughing, sneezing, and swollen or irritated nasal mucosa and sinuses.
- **Eye:** Vapors or mist may cause irritation to the eyes and mucous membranes.
- **Skin:** Exposure to **Used Oil** can cause skin irritation characterized by skin itching, burning, swelling and redness.

Section 4 – First-aid Measures (continued)

4(b) Most important symptoms/effects, acute and delayed (chronic) (continued):

Acute Effects (continued):

- **Ingestion:** Ingestion of this product is an aspiration hazard. Product may enter airways and be fatal if swallowed.

Delayed (chronic) Effects:

- None known/Reported

4(c) Immediate Medical Attention and Special Treatment: If exposed or concerned: Get medical advice/attention.

Section 5 – Fire-fighting Measures

5(a) Suitable (and unsuitable) Extinguishing Media: Extinguish using foam, dry powder or carbon dioxide. Use water to cool fire-exposed containers. If a leak or spill has not ignited, use water fog to disperse the vapors and to provide protection for personnel attempting to stop the leak. Avoid spraying directly into storage containers because of the danger of boil-overs.

5(b) Specific Hazards arising from the chemical: When burned, toxic smoke and vapor may be emitted including, oxides of carbon, aromatic and aliphatic hydrocarbons and other toxic vapors.

5(c) Special protective equipment and precautions for fire-fighters: Self-contained MSHA/NIOSH approved respiratory protection and full protective clothing should be worn when fumes and/or smoke from fire are present. Heat and flames cause emittance of acrid smoke and fumes. Do not release runoff from fire control methods to sewers or waterways. Firefighters should wear full face-piece self-contained breathing apparatus and chemical protective clothing with thermal protection. Direct water stream will scatter and spread flames and, therefore, should not be used. Evacuate area. Remove pressurized gas cylinders from the immediate vicinity. Cool containers exposed to flames with water until well after the fire is out. Close the valve if no risk is involved. Fight fire from a protected location. Prevent buildup of vapors or gases to explosive concentrations.

Section 6 - Accidental Release Measures

6(a) Personal Precautions, Protective Equipment and Emergency Procedures: For spills, clean-up personnel should be protected against contact with eyes and skin. Large spills should be diked and foam applied. Do not release into sewers or waterways. Use absorbent material such as vermiculite or sand to soak up spill. Contain material and follow normal clean-up procedures. Keep unnecessary people away. Isolate hazard area and deny entry. Stay upwind.

6(b) Methods and materials for containment and clean up: Collect material in appropriate, labeled containers for recovery or disposal in accordance with federal, state, and local regulations. Follow applicable OSHA regulations (29 CFR 1910.120) and all other pertinent state and federal requirements.

Section 7 - Handling and Storage

7(a) Precautions for safe handling: Handle and use in accordance with OSHA 29 CFR 1910.106 or local codes. Observe proper industrial hygiene practices. Emergency safety showers and eye wash stations should be present.

7(b) Conditions for safe storage, including any incompatibilities: Store in well-ventilated place. Keep cool. If feasible, store locked up.

Section 8 - Exposure Controls / Personal Protection

8(a) Occupational Exposure Limits (OELs): The following exposure limits are offered as reference, for an experienced industrial hygienist to review.

Ingredients	OSHA PEL ¹	ACGIH TLV ²	NIOSH REL ³	IDLH ⁴
Oil Mist	5.0 mg/m ³ (mist, as mineral)	5.0 mg/m ³ (inhalable fraction ⁵) *	5.0 mg/m ³ (mist, as mineral) “STEL” 10 mg/m ³ (mist, as mineral)	2,500 mg/m ³ (as mineral)

NE - None Established

* Mineral oil (pure, highly and severely refined), excluding metal working fluids

1. OSHA PELs (Permissible Exposure Limits) are 8-hour TWA (time-weighted average) concentrations unless otherwise noted. A (“C”) designation denotes a ceiling limit, which should not be exceeded during any part of the working exposure unless otherwise noted. A Short Term Exposure Limit (STEL) is defined as a 15-minute exposure, which should not be exceeded at any time during a workday. An Action level (AL) is used by OSHA and NIOSH to express a health or physical hazard. They indicate the level of a harmful or toxic substance/activity, which requires medical surveillance, increased industrial hygiene monitoring, or biological monitoring. Action Levels are generally set at one half of the PEL but the actual level may vary from standard to standard. The intent is to identify a level at which the vast majority of randomly sampled exposures will be below the PEL.
2. Threshold Limit Values (TLV) established by the American Conference of Governmental Industrial Hygienists (ACGIH) are 8-hour TWA concentrations unless otherwise noted. ACGIH TLVs are for guideline purposes only and as such are not legal, regulatory limits for compliance purposes. DSEN – May cause dermal sensitization. This notation is used to indicate the potential for dermal sensitization resulting from the interaction of an absorbed agent and ultraviolet light (i.e. photosensitization). RSEN – May cause respiratory sensitization.
3. The National Institute for Occupational Safety and Health Recommended Exposure Limits (NIOSH-REL)- Compendium of Policy and Statements. NIOSH, Cincinnati, OH (1992). NIOSH is the federal agency designated to conduct research relative to occupational safety and health. As is the case with ACGIH TLVs, NIOSH RELs are for guideline purposes only and as such are not legal, regulatory limits for compliance purposes.
4. The “immediately dangerous to life or health air concentration values (IDLHs)” are used by NIOSH as part of the respirator selection criteria and were first developed in the mid-1970’s by NIOSH. The Documentation for Immediately Dangerous to Life or Health Concentrations (IDLHs) is a compilation of the rationale and sources of information used by NIOSH during the original determination of 387 IDLHs and their subsequent review and revision in 1994. Ca is designated as carcinogen.

Section 8 - Exposure Controls / Personal Protection (continued)

8(b) Appropriate Engineering Controls: Use controls as appropriate to minimize exposure to oils during handling operations. Provide general or local exhaust ventilation systems to minimize airborne concentrations. Local exhaust is necessary for use in enclosed or confined spaces. Provide sufficient general/local exhaust ventilation in pattern/volume to control inhalation exposures below current exposure limits.

8(c) Individual Protection Measures:

- **Respiratory Protection:** Seek professional advice prior to respirator selection and use. Follow OSHA respirator regulations (29 CFR 1910.134) and, if necessary, use only a NIOSH-approved respirator. Select respirator based on its suitability to provide adequate worker protection for given working conditions, level of airborne contamination, and presence of sufficient oxygen. Concentration in air of the various contaminants determines the extent of respiratory protection needed. Half-face, negative-pressure, air-purifying respirator equipped with P100 filter is acceptable for concentrations up to 10 times the exposure limit. Full-face, negative-pressure, air-purifying respirator equipped with P100 filter is acceptable for concentrations up to 50 times the exposure limit. Protection by air-purifying negative-pressure and powered air respirators is limited. Use a positive-pressure-demand, full-face, supplied air respirator or self-contained breathing apparatus (SCBA) for concentrations above 50 times the exposure limit. If exposure is above the IDLH (Immediately dangerous to life or health) for any of the constituents, or there is a possibility of an uncontrolled release or exposure levels are unknown, then use a positive-demand, full-face, supplied air respirator with escape bottle or SCBA.

Warning! Air-purifying respirators both negative-pressure and powered-air do not protect workers in oxygen-deficient atmospheres.

- **Eyes:** Employees should be required to wear chemical safety glasses to prevent eye contact. A face shield should be used when appropriate to prevent contact with splashed materials. Chemical goggles, face shields or glasses should be worn to prevent eye contact. Contact lenses should not be worn where industrial exposure to this material is likely.
- **Skin:** Persons handling this product should wear appropriate clothing to prevent skin contact. Wear protective gloves.
- **Other protective equipment:** An eyewash fountain and deluge shower should be readily available in the work area.

Section 9 - Physical and Chemical Properties

9(a) Appearance (physical state, color, etc.): Black oil

9(b) Odor: None

9(c) Odor Threshold: NA

9(d) pH: 7

9(e) Melting Point/Freezing Point: NA

9(f) Initial Boiling Point and Boiling Range: $\geq 130^{\circ}\text{F}$ ($\geq 54^{\circ}\text{C}$)

9(g) Flash Point: $>200^{\circ}\text{F}$

9(h) Evaporation Rate: NA

9(i) Flammability (liquid): Non-flammable

NA - Not Applicable

ND - Not Determined for product as a whole

9(j) Upper/lower Flammability or Explosive Limits: NA

9(k) Vapor Pressure: NA

9(l) Vapor Density (Air = 1): NA

9(m) Relative Density: 0.8-1 SG

9(n) Solubility(ies): ND

9(o) Partition Coefficient n-octanol/water: ND

9(p) Auto-ignition Temperature: ND

9(q) Decomposition Temperature: ND

9(r) Viscosity: 101-500

Section 10 - Stability and Reactivity

10(a) Reactivity: Not Determined (ND) for product as a whole.

10(b) Chemical Stability: Stable under normal storage and handling conditions.

10(c) Possibility of hazardous reaction: No Data Found


10(d) Conditions to Avoid: Storage with incompatible materials. Avoid heat, flame, or ignition sources.

10(e) Incompatible Materials: Oxidizing agents.

10(f) Hazardous Decomposition Products: Oxides of carbon and nitrogen, aromatic hydrocarbons, and other toxic vapors may be released at high temperatures.

Section 11 - Toxicological Information

11 Information on Toxicological Effects: The following toxicity data has been determined for **Used Oil** by using the information available for its components applied to the guidance on the preparation of an SDS under the GHS requirements of OSHA and the EU CPL. Individual hazard classification categories where the available toxicological data has met or exceeded a classification threshold are provided in the table below:

Hazard Classification	Hazard Category		Hazard Symbols	Signal Word	Hazard Statement
	EU	OSHA			
Aspiration Hazard (Category 1)	1	1 ^e		Danger	May be fatal if swallowed and enters airways.

* NR Not Rated - Available data does not meet criteria for classification.

Section 11 - Toxicological Information

11 Information on Toxicological Effects (continued):

Below is additional toxicological data regarding this product:

- a. No LC₅₀ or LD₅₀ has been established for **Used Oil**. The following data has been determined for the components:
 - **Mineral Oil:** LD₅₀ (rat) > 5000 mg/kg (REACH and IUCLID)
- b. No Skin (Dermal) Irritation data available for **Used Oil** as a mixture. The following Skin Irritation information was found for the components:
 - **Mineral Oil:** Rabbit Not Irritating (REACH and IUCLID).
- c. No Eye Irritation data available for **Used Oil** as a mixture. The following Eye Irritation information was found for the components:
 - **Mineral Oil:** Rabbit Not Irritating (REACH and IUCLID).
- d. No Skin (Dermal)/Respiratory Sensitization data available for **Used Oil** as a mixture. The following Skin (Dermal) Sensitization information was found for the components:
 - **Mineral Oil:** Guinea Pig Not Sensitizing (REACH and IUCLID).
- e. No Aspiration Hazard data available for **Used Oil** as a mixture. The following Aspiration Hazard information was found for the components:
 - **Mineral Oil:** Kinematic viscosity is ≤ 20.5.
- f. No Germ Cell Mutagenicity data available for **Used Oil** as a mixture. The following Mutagenicity and Genotoxicity information was found for the components:
 - **Mineral Oil:** Ames Negative. Mouse Lymphoma Negative.
- g. Carcinogenicity: IARC, NTP, and OSHA do not list **Used Oil** as carcinogens. The following Carcinogenicity information was found for the components:
 - **Mineral oil (pure, highly and severely refined):** IARC-3 (highly refined), unclassifiable as to carcinogenicity in humans; ACGIH TLV-A4, not classifiable as a human carcinogen
- h. No Toxic Reproduction data available for **Used Oil** as a mixture. The following Toxic Reproductive information was found for the components:
 - **Mineral Oil:** Rat Dermal OECD Repro screening NOAEL ≥ 1000 mg/kg /day. Rat Dermal 1 gen repro NOAEL ≥ 2000 mg/kg no effects.
- i. No Specific Target Organ Toxicity (STOT) following a Single Exposure data available for **Used Oil** as a mixture or its components.
- j. No Specific Target Organ Toxicity (STOT) following Repeated Exposure data was available for **Used Oil** as a whole. The following STOT following Repeated Exposure data was found for the components:

The above toxicity information was determined from available scientific sources to illustrate the prevailing posture of the scientific community. The scientific resources includes: The American Conference of Governmental Industrial Hygienist (ACGIH) Documentation of the Threshold Limit Values (TLVs) and Biological Exposure indices (BEIs) with Other Worldwide Occupational Exposure Values 2018, The International Agency for Research on Cancer (IARC), The National Toxicology Program (NTP) updated documentation, the World Health Organization (WHO) and other available resources, the International Uniform Chemical Information Database (IUCLID), European Union Risk Assessment Report (EU-RAR), Concise International Chemical Assessment Documents (CICAD), European Union Scientific Committee for Occupational Exposure Limits (EU-SCOEL), Agency for Toxic Substances and Disease Registry (ATSDR), Hazardous Substance Data Bank (HSDB), and International Programme on Chemical Safety (IPCS).

The following health hazard information is provided regardless to classification criteria and is based on the individual component(s):

Acute Effects by Component:

- **MINERAL OIL:** Aspiration hazard. May cause irritation to skin and eyes.

Delayed (chronic) Effects by Component:

- **MINERAL OIL:** Not Reported/ Not Classified

Section 12 - Ecological Information

12(a) Ecotoxicity (aquatic & terrestrial): No Data Found

12(b) Persistence & Degradability: Loss due to volatility

12(c) Bioaccumulative Potential: No Data Found

12(d) Mobility (in soil): No Data Found

12(e) Other adverse effects: No Data Found

Additional Information:

Hazard Category: Not Reported

Signal Word: No Signal Word

Hazard Symbol: No Symbol

Hazard Statement: No Statement

Section 13 - Disposal Considerations

Disposal: Dispose of in accordance with Local, State, Federal and International regulations. Observe safe handling precautions.

Container Cleaning and Disposal: Follow Local, State, Federal and International regulations. Observe safe handling precautions

Section 14 - Transport Information

14 (a-g) Transportation Information:

US Department of Transportation (DOT) under 49 CFR 172.101 may regulate **Used Oil** as a hazardous material under certain circumstances. All Local, State, Federal and International laws and regulations that apply to the transport of this type of material must be adhered.

Section 15 - Regulatory Information

Regulatory Information: The following listing of regulations relating to an ArcelorMittal product may not be complete and should not be solely relied upon for all regulatory compliance responsibilities.

This product and/or its constituents are subject to the following regulations:

OSHA Regulations: Air Contaminant (29 CFR 1910.1000, Table Z-1, Z-2, Z-3): The product, **Used Oil** as a whole is not listed. However, individual components of the product are listed: Refer to Section 8, Exposure Controls and Personal Protection.

EPA Regulations: The product, **Used Oil** is not listed as a whole. However, individual components of the product are listed:

Components	Regulations
Not Applicable	Not Listed (However, individual components of the product may be listed.)

SARA 311/312 Potential Hazard Categories: Immediate Acute Health Hazard; Delayed Chronic Health Hazard

Regulations Key:

CAA	Clean Air Act (42 USC Sec. 7412; 40 CFR Part 61 [As of: 8/18/06])
CERCLA	Comprehensive Environmental Response, Compensation and Liability Act (42 USC Secs. 9601(14), 9603(a); 40 CFR Sec. 302.4, Table 302.4, Table 302.4 and App. A)
CWA	Clean Water Act (33 USC Secs. 1311; 1314(b), (c), (e), (g); 136(b), (c); 137(b), (c) [as of 8/2/06])
RCRA	Resource Conservation Recovery Act (42 USC Sec. 6921; 40 CFR Part 261 App VIII)
SARA	Superfund Amendments and Reauthorization Act of 1986 Title III Section 302 Extremely Hazardous Substances (42 USC Secs. 11023, 13106; 40 CFR sec. 372.65) and Section 313 Toxic Chemicals (42 USC Secs. 11023, 13106; 40 CFR Sec. 372.65 [as of 6/30/05])
TSCA	Toxic Substance Control Act (15 U.S.C. s/s 2601 et seq. [1976])
SDWA	Safe Drinking Water Act (42 U.S.C. s/s 300f et seq. [1974])

SARA 313 Supplier Notification: The product, **Used Oil** does not contain any of the toxic chemicals subject to the reporting requirements of section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR part 372.

State Regulations: The product, **Used Oil** as a whole is not listed in any state regulations. However, individual components of the product **may** be listed in various state regulations:

- **Pennsylvania Right to Know:** **Used Oil** as a whole is not listed. However, individual components of the product may be listed.

California Prop. 65: This product does not contain chemicals which is known to the State of California to cause cancer or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

- **New Jersey:** **Used Oil** as a whole is not listed. However, individual components of the product may be listed.
- **Minnesota:** **Lubricating Oils, Used** is listed on the Chemicals of High Concern.
- **Massachusetts:** **Used Oil** as a whole is not listed. However, individual components of the product may be listed.

Other Regulations: **Used Oil** as a whole may not be listed in other regulations. However, individual components may be listed, check appropriate regulations for further regulatory compliance.

WHMIS Classification (Canadian): The product, **Used Oil** is not listed as a whole. However, Mineral oil is listed as not a dangerous product according to HPR classification criteria

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the SDS contains all the information required by the Controlled Products Regulations.

Section 16 - Other Information

Prepared By: ArcelorMittal USA LLC

Original Issue Date: 06/08/2015

Revised: 11/29/2018

Additional Information:

Hazardous Material Identification System (HMIS) Classification


Health Hazard	1
Fire Hazard	0
Physical Hazard	0

HEALTH= 1, * Denotes possible chronic hazard if airborne dusts or fumes are generated. Irritation or minor reversible injury possible.

FIRE= 0, Materials that will not burn.

PHYSICAL HAZARDS = 0, Materials that are normally stable, even under fire conditions, and will not react with water, polymerize, decompose, condense, or self-react. Non-explosives.

National Fire Protection Association (NFPA)



HEALTH = 1, Exposure could cause irritation but only minor residual injury even if no treatment is given.

FIRE = 0, Materials that will not burn.

INSTABILITY = 0, Normally stable, even under fire exposure conditions, and are not reactive with water.

Section 16 - Other Information (continued)

ABBREVIATIONS/ACRONYMS:

ACGIH	American Conference of Governmental Industrial Hygienists	NIF	No Information Found
BEIs	Biological Exposure Indices	NIOSH	National Institute for Occupational Safety and Health
CAS	Chemical Abstracts Service	NTP	National Toxicology Program
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act	ORC	Organization Resources Counselors
CFR	Code of Federal Regulations	OSHA	Occupational Safety and Health Administration
CNS	Central Nervous System	PEL	Permissible Exposure Limit
GI, GIT	Gastro-Intestinal, Gastro-Intestinal Tract	PNOR	Particulate Not Otherwise Regulated
HMIS	Hazardous Materials Identification System	PNOC	Particulate Not Otherwise Classified
IARC	International Agency for Research on Cancer	PPE	Personal Protective Equipment
LC50	Median Lethal Concentration	ppm	parts per million
LD50	Median Lethal Dose	RCRA	Resource Conservation and Recovery Act
LD_{Lo}	Lowest Dose to have killed animals or humans	RTECS	Registry of Toxic Effects of Chemical Substances
LEL	Lower Explosive Limit	SARA	Superfund Amendment and Reauthorization Act
LOEL	Lowest Observed Effect Level	SCBA	Self-contained Breathing Apparatus
LOAEC	Lowest Observable Adverse Effect Concentration	SDS	Safety Data Sheet
µg/m³	microgram per cubic meter of air	STEL	Short-term Exposure Limit
mg/m³	milligram per cubic meter of air	TLV	Threshold Limit Value
mppcf	million particles per cubic foot	TWA	Time-weighted Average
MSHA	Mine Safety and Health Administration	UEL	Upper Explosive Limit
NFPA	National Fire Protection Association		

Disclaimer: This information is taken from sources or based upon data believed to be reliable. Our objective in sending this information is to help you protect the health and safety of your personnel and to comply with the OSHA Hazard Communication Standard and Title III of the Emergency Planning and Community Right-to-Know Act. ArcelorMittal USA LLC makes no warranty as to the absolute correctness, completeness, or sufficiency of any of the foregoing, or any additional, or other measures that may not be required under particular conditions. THIS ARCELORMITTAL USA LLC SDS MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY, OR ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, AND ANY IMPLIED WARRANTIES OTHERWISE ARISING FROM COURSE OF DEALING OR TRADE.

Used Oil

Signal Word: DANGER

Symbols:



HAZARD STATEMENTS:

May be fatal if swallowed and enters airways.

PRECAUTIONARY STATEMENTS:

If swallowed: Immediately call a poison center or doctor/physician.

Do NOT induce vomiting.

Store locked up.

Dispose of contents in accordance with federal, state and local regulations.

SDS ID No.: AM USA-9001

ArcelorMittal USA LLC
1 South Dearborn Street
Chicago, IL 60603-9888

General Information: Phone: 219-787-4901 or email at: msdssupport@arcelormittal.com

CHEMTREC (Day or Night): 1-800-424-9300







Emergency Contact: 1-760-476-3962, (Verisk 3E Company Code: 333211)

Original Issue Date: 09/17/2014

Revised: 11/29/2018



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104 SAP: 120, 121, 122, 287
Synonym	Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate.	Validated on	3/2/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Diesel oil. 2) Proprietary additives. 3) Aromatic content is 50% maximum (benzene: nil). 4) * Notice of Intended Change (2000): 100 mg/m ³ , skin, A3.	68334-30-5 Not available	>99.9 <0.1	Not established* Not established	Not established Not established	Not established Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Eye contact may cause mild eye irritation. Skin contact can cause moderate to severe irritation and produce drying, cracking, or defatting dermatitis. Inhalation of vapours can cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Inhalation can also cause irritation of nose and throat. Aspiration of liquid drops into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	LOWER: 0.7%, UPPER: 6%
Flash Points	Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions

NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible).

CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.

If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.

SMALL FIRES: Dry chemical, CO₂, water spray or regular foam.

LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk.

Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.

Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.

Section 6. Accidental Release Measures**Material Release or Spill**

NAERG96, GUIDE 128, Flammable Liquids (Non-polar/ Water-immiscible).

ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT ingest. Do not breathe gas/vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately. Avoid contact with skin and eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.

Storage

Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles. Ground all equipment containing material.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - *The selection of personal protective equipment varies, depending upon conditions of use.*

Eyes Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3-4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown. Low sulphur diesel fuels (<0.05 wt % sulphur) are colourless to light yellow (and may be dyed red for taxation purposes). Regular sulphur diesel fuels (0.05-0.50 % sulphur) may be colourless to yellow / brown and are usually dyed red for taxation purposes.	Pour Point	Variable, 0°C to -50°C (32°F to -58°F)
Odour	Petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150-371°C (302-700°F)	Penetration	Not applicable.
Density	0.85 kg/L @ 15°C (Water = 1).	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not applicable.

Vapour Pressure	1.0 kPa @ 20°C (7.5 mmHg @ 68°F).	Dispersion Properties	Not available
Volatility	<0.1 (Butyl acetate = 1), less than gasoline.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Acute oral toxicity (LD50): 7500 mg/kg (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Skin contact may cause moderate to severe irritation. Repeated exposure would produce drying and cracking or defatting dermatitis.
Inhalation Route:	Inhalation of vapours can cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Inhalation can also cause irritation of nose and throat.
Oral Route:	Aspiration of liquid drops into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure.
Eye Irritation/Inflammation:	Eye contact may cause mild irritation, but no permanent damage.
Immunotoxicity:	Not available
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	ACGIH Notice of Intended Change (2000): proposed A3: animal carcinogen. [Diesel oil]
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Diesel Fuel UN1202 3 III	Special Provisions for Transport	Not applicable.
---------------------------	-----------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																						
		All components of this formulation are listed on the US EPA-TSCA Inventory.																						
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																						
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																						
		Please contact Product Safety for more information.																						
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).																			
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																				
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	2*	Fire Hazard	2	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard		<table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr></table>	Rating	0 Insignificant		1 Slight		2 Moderate		3 High		4 Extreme
Health Hazard	2*																							
Fire Hazard	2																							
Reactivity	0																							
Personal Protection	H																							
Rating	0 Insignificant																							
	1 Slight																							
	2 Moderate																							
	3 High																							
	4 Extreme																							

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

<p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> <p>EPCRA - Emergency Planning and Community Right to Know Act</p> <p>FDA - Food and Drug Administration</p> <p>FIFRA - Federal Insecticide, Fungicide and Rodenticide Act</p> <p>HCS - Hazardous Communication System</p> <p>HMIS - Hazardous Material Information System</p> <p>IARC - International Agency for Research on Cancer</p>	<p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>TLM - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> <p>WHMIS - Workplace Hazardous Material Information System</p>
--	--

For Copy of MSDS

Fuels & Solvents:
Western Canada, telephone: 403-296-4158; fax: 403-296-6551
Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - TAR on 3/2/2001.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

SECTION 1. IDENTIFICATION

Product name : GASOLINE, UNLEADED

Synonyms : Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, TQRUL, transitional quality regular unleaded, BOB, Blendstock for Oxygenate Blending, Conventional Gasoline, RUL, MUL, SUL, PUL.

Product code : 100127, 100126, 101823, 100507, 101811, 101814, 100141, 101813, 101810, 101812, 100063, 101822, 100138, 101821, 100064, 101820, 101819, 100506, 101818, 101816, 101817, 100488

Manufacturer or supplier's details
Petro-Canada
P.O. Box 2844, 150 - 6th Avenue South-West
Calgary Alberta T2P 3E3
Canada

Emergency telephone number
Suncor Energy: +1 403-296-3000;
Canutec Transportation: 1-888- 226-8832 (toll-free) or 613-996-6666;
Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use : Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Clear liquid.
Colour	Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
Odour	Gasoline

GHS Classification

Flammable liquids : Category 1

Skin irritation : Category 2

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

Germ cell mutagenicity	: Category 1B
Carcinogenicity	: Category 1A
Reproductive toxicity	: Category 2
Specific target organ toxicity - single exposure	: Category 3 (Central nervous system)
Specific target organ toxicity - repeated exposure	: Category 1
Aspiration hazard	: Category 1

GHS label elements

Hazard pictograms	:	  
-------------------	---	--

Signal word	: Danger
-------------	----------

Hazard statements	: Extremely flammable liquid and vapour. May be fatal if swallowed and enters airways. Causes skin irritation. May cause drowsiness or dizziness. May cause genetic defects. May cause cancer. Suspected of damaging the unborn child. Causes damage to organs () through prolonged or repeated exposure.
-------------------	---

Precautionary statements	: Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Keep container tightly closed. Ground/bond container and receiving equipment. Use explosion-proof electrical/ ventilating/ lighting/ equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Do not breathe dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/ protective clothing/ eye protection/ face protection. Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. IF INHALED: Remove person to fresh air and keep comfortable
--------------------------	--

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

for breathing. Call a POISON CENTER/doctor if you feel unwell.
IF exposed or concerned: Get medical advice/ attention.
Do NOT induce vomiting.
If skin irritation occurs: Get medical advice/ attention.
Take off contaminated clothing and wash before reuse.
In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

Storage:

Store in a well-ventilated place. Keep container tightly closed.
Store in a well-ventilated place. Keep cool.
Store locked up.

Disposal:

Dispose of contents/ container to an approved waste disposal plant.

Potential Health Effects

Primary Routes of Entry	: Eye contact Ingestion Inhalation Skin contact
Target Organs	: Blood Immune system
Inhalation	: Inhalation may cause central nervous system effects. Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness.
Skin	: Causes skin irritation.
Eyes	: May irritate eyes.
Ingestion	: Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea. Aspiration hazard if swallowed - can enter lungs and cause damage.
Chronic Exposure	: Chronic exposure to benzene may result in increased risk of leukemia and other blood disorders.
Aggravated Medical Condition	: None known.

Other hazards

None known.

IARC

Group 1: Carcinogenic to humans

Benzene

71-43-2

OSHA

OSHA specifically regulated carcinogen

Benzene

71-43-2

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

NTP

Known to be human carcinogen

Benzene

71-43-2

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
gasoline, natural	8006-61-9	95 - 100 %
toluene	108-88-3	1 - 40 %
benzene	71-43-2	0.5 - 1.5 %
ethanol	64-17-5	0.1 - 0.3 %

SECTION 4. FIRST AID MEASURES

- If inhaled : Artificial respiration and/or oxygen may be necessary.
Move to fresh air.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Rinse mouth with water.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
Seek medical advice.
- Most important symptoms and effects, both acute and delayed : None known.
- Protection of first-aiders : First Aid responders should pay attention to self-protection and use the recommended protective clothing
It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

SECTION 5. FIREFIGHTING MEASURES

- | | |
|---------------------------------------|--|
| Suitable extinguishing media | : Dry chemical
Carbon dioxide (CO ₂)
Water fog.
Foam |
| Unsuitable extinguishing media | : Do NOT use water jet. |
| Specific hazards during fire-fighting | : Cool closed containers exposed to fire with water spray. |
| Hazardous combustion products | : Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion. |
| Further information | : Prevent fire extinguishing water from contaminating surface water or the ground water system. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- | | |
|---|---|
| Personal precautions, protective equipment and emergency procedures | : Use personal protective equipment.
Ensure adequate ventilation.
Evacuate personnel to safe areas.
Material can create slippery conditions. |
| Environmental precautions | : If the product contaminates rivers and lakes or drains inform respective authorities. |
| Methods and materials for containment and cleaning up | : Prevent further leakage or spillage if safe to do so.
Remove all sources of ignition.
Soak up with inert absorbent material.
Non-sparking tools should be used.
Ensure adequate ventilation.
Contact the proper local authorities. |

SECTION 7. HANDLING AND STORAGE

- | | |
|-------------------------|--|
| Advice on safe handling | : For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
Use only with adequate ventilation.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.
Avoid contact with skin, eyes and clothing.
Do not ingest.
Keep away from heat and sources of ignition.
Keep container closed when not in use. |
|-------------------------|--|

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

Conditions for safe storage : Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
gasoline, natural	8006-61-9	TWA	300 ppm 900 mg/m ³	OSHA P0
		STEL	500 ppm 1,500 mg/m ³	OSHA P0
		TWA	500 ppm 2,000 mg/m ³	OSHA Z-1
		STEL	500 ppm 1,500 mg/m ³	CAL PEL
		PEL	300 ppm 900 mg/m ³	CAL PEL
toluene	108-88-3	TWA	20 ppm	ACGIH
		TWA	100 ppm 375 mg/m ³	NIOSH REL
		ST	150 ppm 560 mg/m ³	NIOSH REL
		TWA	200 ppm	OSHA Z-2
		CEIL	300 ppm	OSHA Z-2
		Peak	500 ppm (10 minutes)	OSHA Z-2
		TWA	100 ppm 375 mg/m ³	OSHA P0
		STEL	150 ppm 560 mg/m ³	OSHA P0
		PEL	10 ppm 37 mg/m ³	CAL PEL
		C	500 ppm	CAL PEL
		STEL	150 ppm 560 mg/m ³	CAL PEL
benzene	71-43-2	TWA	0.5 ppm	ACGIH
		STEL	2.5 ppm	ACGIH
		TWA	0.1 ppm	NIOSH REL
		ST	1 ppm	NIOSH REL
		TWA	10 ppm	OSHA Z-2
		CEIL	25 ppm	OSHA Z-2
		Peak	50 ppm (10 minutes)	OSHA Z-2
		PEL	1 ppm	OSHA CARC
		STEL	5 ppm	OSHA CARC

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

		PEL	1 ppm	CAL PEL
		STEL	5 ppm	CAL PEL
ethanol	64-17-5	TWA	1,000 ppm 1,900 mg/m ³	NIOSH REL
		TWA	1,000 ppm 1,900 mg/m ³	OSHA Z-1
		TWA	1,000 ppm 1,900 mg/m ³	OSHA P0
		STEL	1,000 ppm	ACGIH
		PEL	1,000 ppm 1,900 mg/m ³	CAL PEL

Biological occupational exposure limits

Components	CAS-No.	Control parameters	Biological specimen	Sam-pling time	Permissible concentra-tion	Basis
Toluene	108-88-3	Toluene	In blood	Prior to last shift of work-week	0.02 mg/l	ACGIH BEI
		Toluene	Urine	End of shift (As soon as possible after exposure ceases)	0.03 mg/l	ACGIH BEI

Engineering measures

- : Use only in well-ventilated areas.
- Ensure that eyewash station and safety shower are proximal to the work-station location.

Personal protective equipment

Respiratory protection

- : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type

- : A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hand protection Material

- : polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness,

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Remarks	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash contaminated clothing before re-use.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Clear liquid.
Colour	: Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
Odour	: Gasoline
Odour Threshold	: No data available
pH	: No data available
Pour point	: No data available
Boiling point/boiling range	: 25 - 225 °C (77 - 437 °F)
Flash point	: -50 - -38 °C (-58 - -36 °F) Method: Tagliabue.
Auto-Ignition Temperature	: 257 °C (495 °F)
Evaporation rate	: No data available
Flammability	: Extremely flammable in presence of open flames, sparks, shocks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
Upper explosion limit	: 7.6 %(V)

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

Lower explosion limit	: 1.3 %(V)
Vapour pressure	: < 802.5 mmHg (20 °C / 68 °F)
Relative vapour density	: 3
Relative density	: 0.685 - 0.8
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.

SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	: Extremes of temperature and direct sunlight.
Incompatible materials	: Reactive with oxidising agents, acids and interhalogens.
Hazardous decomposition products	: May release CO _x , NO _x , phenols, polycyclic aromatic hydrocarbons, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Ingestion
Inhalation
Skin contact

Acute toxicity

Product:

Acute oral toxicity	: Remarks: No data available
Acute inhalation toxicity	: Remarks: No data available
Acute dermal toxicity	: Remarks: No data available

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

Components:

toluene:

- Acute oral toxicity : LD50 (Rat): 5,580 mg/kg,
- Acute inhalation toxicity : LC50 (Rat): 7585 ppm
Exposure time: 4 h
Test atmosphere: dust/mist
- Acute dermal toxicity : LD50 (Rabbit): 12,125 mg/kg,

benzene:

- Acute oral toxicity : LD50 (Rat): 2,990 mg/kg,
- Acute inhalation toxicity : LC50 (Rat): 13700 ppm
Exposure time: 4 h
Test atmosphere: dust/mist
- Acute dermal toxicity : LD50 (Rabbit): > 8,240 mg/kg,

ethanol:

- Acute oral toxicity : LD50 (Rat): 7,060 mg/kg,
- Acute inhalation toxicity : LC50 (Rat): > 32380 ppm
Exposure time: 4 h
Test atmosphere: vapour

Skin corrosion/irritation

Product:

Remarks: No data available

Serious eye damage/eye irritation

Product:

Remarks: No data available

Respiratory or skin sensitisation

No data available

Germ cell mutagenicity

No data available

Carcinogenicity

No data available

Reproductive toxicity

No data available

STOT - single exposure

No data available

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

STOT - repeated exposure

No data available

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of as hazardous waste in compliance with local and national regulations.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

Contaminated packaging : Do not re-use empty containers.

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0

Revision Date 2017/04/20

Print Date 2017/04/20

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

UN/ID No. : UN 1203
Proper shipping name : Gasoline
Class : 3
Packing group : II
Labels : Class 3 - Flammable Liquid
Packing instruction (cargo aircraft) : 364

IMDG-Code

UN number : UN 1203
Proper shipping name : GASOLINE

Class : 3
Packing group : II
Labels : 3
EmS Code : F-E, S-E
Marine pollutant : no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

49 CFR

UN/ID/NA number : UN 1203
Proper shipping name : Gasoline

Class : 3
Packing group : II
Labels : Class 3 - Flammable Liquid
ERG Code : 128
Marine pollutant : no

SECTION 15. REGULATORY INFORMATION

The components of this product are reported in the following inventories:

DSL

On the inventory, or in compliance with the inventory

TSCA

All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.

EINECS

On the inventory, or in compliance with the inventory

SAFETY DATA SHEET

GASOLINE, UNLEADED



000003000644

Version 2.0


Revision Date 2017/04/20

Print Date 2017/04/20

SECTION 16. OTHER INFORMATION

Further information

NFPA:



HMIS III:

HEALTH	3*
FLAMMABILITY	3
PHYSICAL HAZARD	0
PERSONAL PROTECTION	H

0 = not significant, 1 = Slight,
2 = Moderate, 3 = High
4 = Extreme, * = Chronic

For Copy of SDS

: Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

Prepared by

: Product Safety: +1 905-804-4752

Revision Date

: 2017/04/20

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

SECTION 1. IDENTIFICATION

Product name : PROPANE

Synonyms : Propane HD-5, Propane commercial, Liquefied Petroleum Gas (LPG), C₃H₈, CGSB Propane Grade 1, CGSB Propane Grade 2, odorized propane, stench propane, automotive propane, ER62.

Product code : 100139

Manufacturer or supplier's details

Petro-Canada
P.O. Box 2844, 150 - 6th Avenue South-West
Calgary Alberta T2P 3E3
Canada

Emergency telephone number : CHEMTREC: 1-800-424-9300 (toll free) or +1 703-527-3887;
Suncor Energy: +1 403-296-3000

Recommended use of the chemical and restrictions on use

Recommended use : Propane is used as a fuel gas, refrigerant and as a raw material for organic synthesis. It is also used as a laboratory gas. The grade determines the propane content. It is supplied as pressurized liquid in tanks.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Gas at room temperature; liquid when stored under pressure., compressed liquefied gas
Colour	colourless
Odour	Propane is an odourless gas. Odourized propane will contain up to 30 g Ethyl Mercaptan per 1000 L of propane.

GHS Classification

Flammable gases : Category 1

Gases under pressure : Liquefied gas

Simple Asphyxiant : Category 1

GHS label elements

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Hazard pictograms



Signal word

: Danger

Hazard statements

: Extremely flammable gas.
Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

: **Prevention:**
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
Response:
Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
In case of leakage, eliminate all ignition sources.
Storage:
Protect from sunlight. Store in a well-ventilated place.

Potential Health Effects

Primary Routes of Entry

: Eye contact
Inhalation
Skin contact

Aggravated Medical Condition

: None known.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture

: Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
propane	74-98-6	90 - 100 %
propene	115-07-1	1 - 5 %
butane	106-97-8	1 - 2.5 %

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

ethane	74-84-0	1 - 1.5 %
methane	74-82-8	0.1 - 0.2 %

All above concentrations are percent by volume.

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash contaminated clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Not a significant route of exposure.
- Most important symptoms and effects, both acute and delayed : Inhalation may cause central nervous system effects.
Inhalation of vapours may cause drowsiness, headache, dizziness and disorientation.
May cause irritation of respiratory tract.
Contact with rapidly expanding gas may cause burns or frost-bite.
Overexposure may lead to cardiac sensitization.
High concentrations can remove oxygen and cause dizziness or suffocation.
- Notes to physician : Treat symptomatically.
Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
- Unsuitable extinguishing media : No information available.
- Specific hazards during fire-fighting : If the product release cannot be shut off safely, allow the product to burn itself out.
Cool closed containers exposed to fire with water spray.
- Hazardous combustion products : Carbon oxides (CO, CO₂), smoke and irritating vapours as products of incomplete combustion.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

- | | | |
|---|---|---|
| Further information | : | Prevent fire extinguishing water from contaminating surface water or the ground water system. |
| Special protective equipment for firefighters | : | Wear self-contained breathing apparatus and full protective wear.
Wear a positive-pressure supplied-air respirator with full face-piece. |

SECTION 6. ACCIDENTAL RELEASE MEASURES

- | | | |
|---|---|--|
| Personal precautions, protective equipment and emergency procedures | : | Use personal protective equipment.
Ensure adequate ventilation.
Evacuate personnel to safe areas.
In case of inadequate ventilation wear respiratory protection.
Remove all sources of ignition. |
| Environmental precautions | : | If the product contaminates rivers and lakes or drains inform respective authorities. |
| Methods and materials for containment and cleaning up | : | Prevent further leakage or spillage if safe to do so.
Ensure adequate ventilation.
Use explosion-proof ventilation equipment.
Non-sparking tools should be used.
Contact the proper local authorities. |

SECTION 7. HANDLING AND STORAGE

- | | | |
|-----------------------------|---|--|
| Advice on safe handling | : | For personal protection see section 8.
Smoking, eating and drinking should be prohibited in the application area.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid contact with skin, eyes and clothing.
Avoid breathing gas.
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.
Use only with adequate ventilation.
Keep away from heat and sources of ignition.
Keep container closed when not in use.
Do not use sparking tools.
Do not enter areas where used or stored until adequately ventilated. |
| Conditions for safe storage | : | Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.
Keep away from sources of ignition - No smoking.
Ensure the storage containers are grounded/bonded. |

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
propane	74-98-6	TWA	1,000 ppm	CA AB OEL
		TWA	1,000 ppm	CA BC OEL
		TWAEV	1,000 ppm 1,800 mg/m ³	CA QC OEL
propene	115-07-1	TWA	500 ppm 860 mg/m ³	CA AB OEL
		TWA	500 ppm	CA BC OEL
		TWA	500 ppm	ACGIH
butane	106-97-8	TWA	1,000 ppm	CA AB OEL
		TWA	600 ppm	CA BC OEL
		STEL	750 ppm	CA BC OEL
		TWAEV	800 ppm 1,900 mg/m ³	CA QC OEL
		STEL	1,000 ppm	ACGIH
ethane	74-84-0	TWA	1,000 ppm	CA AB OEL
		TWA	1,000 ppm	CA BC OEL

Engineering measures : Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.
Use only in well-ventilated areas.
Use explosion-proof ventilation equipment.

Personal protective equipment

Respiratory protection : Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : Always wear NIOSH-approved self-contained breathing apparatus when handling this material.

Hand protection
Material : Wear insulated gloves to prevent frostbite. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash contaminated clothing before re-use. Wear suitable protective equipment.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Gas at room temperature; liquid when stored under pressure., compressed liquefied gas
Colour	: colourless
Odour	: Propane is an odourless gas. Odourized propane will contain up to 30 g Ethyl Mercaptan per 1000 L of propane.
Odour Threshold	: No data available
pH	: No data available
Melting point/freezing point	: No data available
Boiling point/boiling range	: -42 °C (-44 °F)
Decomposition temperature	No data available
Flash point	: -104 °C (-155 °F) Method: closed cup
Auto-Ignition Temperature	: 450 °C (842 °F)
Evaporation rate	: No data available
Flammability	: Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
Upper explosion limit	: 9.5 %(V)
Lower explosion limit	: 2.1 %(V)
Vapour pressure	: 10,763 mmHg (38 °C / 100 °F)
Relative vapour density	: 1.56

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Relative density	:	No data available
Solubility(ies)		
Water solubility	:	No data available
Partition coefficient: n-octanol/water	:	No data available
Viscosity		
Viscosity, kinematic	:	No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity	:	No dangerous reaction known under conditions of normal use.
Chemical stability	:	Stable under normal conditions.
Possibility of hazardous reactions	:	Hazardous polymerisation does not occur.
Conditions to avoid	:	Heat, flames and sparks.
Incompatible materials	:	Reactive with oxidising agents and halogenated compounds.
Hazardous decomposition products	:	May release COx, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Inhalation
Skin contact

Acute toxicity

Product:

Acute oral toxicity	:	Remarks: Based on available data, the classification criteria are not met.
Acute inhalation toxicity	:	Remarks: Based on available data, the classification criteria are not met.
Acute dermal toxicity	:	Remarks: Based on available data, the classification criteria are not met.

Components:

butane:

Acute inhalation toxicity	:	LC50 (Rat): 658 mg/l
---------------------------	---	----------------------

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Exposure time: 4 h
Test atmosphere: gas

Skin corrosion/irritation

Product:

Remarks: Based on available data, the classification criteria are not met.

Serious eye damage/eye irritation

Product:

Remarks: Based on available data, the classification criteria are not met.

Respiratory or skin sensitisation

Product:

Remarks: Based on available data, the classification criteria are not met.

Germ cell mutagenicity

Product:

Germ cell mutagenicity-
Assessment

Based on available data, the classification criteria are not met.

Carcinogenicity

Product:

Carcinogenicity - As-
sessment

Based on available data, the classification criteria are not met.

Reproductive toxicity

Product:

Reproductive toxicity -
Assessment

Based on available data, the classification criteria are not met.

STOT - single exposure

Product:

Remarks: Based on available data, the classification criteria are not met.

STOT - repeated exposure

Product:

Remarks: Based on available data, the classification criteria are not met.

No data available

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish :
Remarks: No data available

Toxicity to daphnia and other :
aquatic invertebrates Remarks: No data available

Toxicity to algae :
Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of as hazardous waste in compliance with local and national regulations.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

UN/ID No. : UN 1978

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Proper shipping name : Propane
Class : 2.1
Packing group : Not assigned by regulation
Labels : Class 2 - Gases: Flammable (Division 2.1)
Packing instruction (cargo aircraft) : 200

IMDG-Code

UN number : UN 1978
Proper shipping name : PROPANE

Class : 2.1
Packing group : Not assigned by regulation
Labels : 2.1
EmS Code : F-D, S-U
Marine pollutant : no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

TDG

UN number : UN 1978
Proper shipping name : PROPANE

Class : 2.1
Packing group : Not assigned by regulation
Labels : 2.1
ERG Code : 115
Marine pollutant : no

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the Hazardous Products Regulations (HPR) and the SDS contains all of the information required by the HPR.

The components of this product are reported in the following inventories:

DSL On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

For Copy of SDS : Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2020/01/27

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.