

## **APPENDIX I**

**Spill Contingency Plan**

**September 2016**

# **SPILL CONTINGENCY PLAN**

**for the**

## **BEAR PROPERTY**

**Sunrise Lake Area  
District of Mackenzie  
Northwest Territory**

- Report Prepared By –

### **Silver Bear Mines Inc.**

1–12 Blackfoot Rd.  
Sherwood Park, Alberta  
Canada T8A 4P4

Tel: (780) 416–7525 Fax: (780) 416–7500

## INTRODUCTION

Since 1983 Silver Bear Mines Inc. (the 'Company' or 'SBM') and its predecessor companies have conducted mineral exploration work from their field camp near Sunrise Lake, about 110 km northeast of Yellowknife, NWT. This past work consisted of: survey grid line cutting; geological, geochemical and geophysical surveying; and several diamond drilling campaigns.

This plan is an update of the 2014 Spill Contingency Plan already prepared for this property. The Company is prepared to improve and establish appropriate fuel handling and storage facilities according to more recent guidelines. Awareness and instruction in the safe transfer of fuel at various locations will be stressed, and strategies to control and minimize any effects of possible hazardous spills will be paramount.

This property is located at 62 50'30"N to 62 54' 30"N by 112 34'00" W to 112 22'50"W. Map sheet Sunset Lake, page #281; UTM 12, NAD 83- 426000E to 429000E/6974000N to 6977000N.

The owner and operator of this property is;

Silver Bear Mines Inc., #24 Blackfoot Road, Sherwood Park, AB. T8A 4P4

Telephone: 780-416 7525 Fax: 780-416-7500 email: garnet@silverbearmines.com

Office Administrator: Garnet Harter. 780-416-7525, email: garneth@silverbearmines.com

Our waste generator # - NTG000394 through Gerald Enns- Hazardous Waste Specialist- Environment Division, Environment and Natural Resources, Yellowknife, NT.

Effective date of this spill contingency plan will be July 22, 2024

Contact Person: Project Geologist- J. Douglas Blanchflower phone: 604-857-0442

Doug Blanchflower, project geologist or other geologists in charge at the time will have first aid certification and Spill Containment course credentials. Drilling personnel will also have standard first aid certification.

## PURPOSE AND SCOPE

The purpose of this plan is to establish the approved safe storage of hazardous materials for use on the property, and to establish a course of action for possible hazardous spills.

This plan will identify the personnel and their responsibilities in the event of a spill. It will outline the equipment and resources available for spill response, and outline spill response procedures to minimize potential health and safety hazards, environmental damage and clean-up efforts.

Silver Bear Mines has maintained hazardous material storage procedures under the guidance and inspections of the Resource Management Officer (Ken Dahl) during his property visits. The main objective has been to protect Company employees and contractors while in camp and the environment, including the local Aboriginal community.

The Company will comply with legislation, regulations and authorizations relating to establishment of this spill control plan to be prepared for any possible future hazardous spills.

## SITE DESCRIPTION

The Bear property is situated immediately west of Sunrise Lake (aka Sunset Lake), about 110 km northeast of Yellowknife. It is accessible year-round by float- and/or ski-equipped aircraft or helicopter, or via a prepared winter access road. There are no known settlements in the vicinity. In the summer of 2014 a forest fire destroyed all of the camp buildings and most of the equipment being stored on site.

A sketch of the proposed reconstructed camp layout is shown in Figure 1 of this report. There are two proposed fuel storage sites at the camp. There is diesel fuel and Jet B storage on an outcrop in the vicinity of the helicopter landing site about 200 m west of the camp. The gasoline and propane storage is south of the generator shed where quad motorcycles and snow machines would refuel. On the west side of the diesel shed is the refueling area for the generator. The reconstructed field camp will include nine cabins, including a kitchen, that are heated generated electricity during the winter. The kitchen stove and water heater are the only appliances using propane. Fuel transfer from barrels to heavy equipment and generators will be done with hand-held toggle pumps.

The camp would be established on level sandy ground about 50 m north of a small creek that flows easterly from C Lake into Sunrise Lake. The camp site is about 75 m from Sunrise Lake (see Figure 1).

Hazardous materials that were stored on site prior to the 2014 forest fire include:

<b>Diesel fuel -</b>	six 210-litre barrels at the destroyed camp site, and six 210-litre barrels at the G Zone north of camp.
<b>Gasoline -</b>	one 210-litre barrel at the G Zone north of camp
<b>Propane -</b>	four 100-lb. cylinders in front of the destroyed generator shed plus two at the destroyed kitchen and one at the destroyed dry building.
<b>Aviation fuel - (Jet B) -</b>	five 210-litre barrels stored at burned helicopter landing site.
<b>Lubricants -</b>	fourteen 1-litre plastic bottles of oils for generator, quads, skidoos and chain saws stored in destroyed core shack.

Future used motor oil, grease and other waste hydrocarbon fluids from the heavy equipment, drill rigs, generators, motorcycles, snowmobiles and other 4-stroke engines will be stored in sealed 210-litre steel barrels and shipped out to an appropriate waste facility on a regular basis.

## EQUIPMENT LIST

### On-Site and Useable

Type and Number	Proposed Use
One D6 Bulldozer w/ wide tracks	Equipment mob and drill site preparation
One Nodwell w/ crane and winch	Local drill support and personnel transport
One 550 John Deere Cat (partially burnt)	Needs on-site repair or demob
One Skidded Drill Shack (burnt)	Possibly repairable on site
One Open Rod Sloop (burnt)	Burnt but repairable for rod storage
One Covered Rod Sloop	Operational for rod storage
Two Skidded Drill Pump Shacks (one fire damaged)	Pumping and storing drilling media
One Tahoe 2700 PSI Pressure Washer	Fire damage cleanup
One Tahoe 3" Trash Pump	Camp grey water pumping
Three Yamaha Bravos Sleds	Drill materials and core transport
One Sea-Can containers	Tool and equipment storage
One Air Compressor	Camp and equipment repair
Two Chain Saws	Dangerous tree falling near camp

**To Be Mobilized From Yellowknife**

<b>Type and Number</b>	<b>Proposed Use</b>
One Snow Cat	Local drill support and personnel transport
One 2005 CAT 928 Loader	Equipment mob and drill site preparation
One Bulldozer (to be purchase)	Equipment mob and drill site preparation
One Hydraulic Excavator	Ice road preparation and road maintenance
One Grader	Ice road preparation and road maintenance
One Dump Truck	Ice road preparation and road maintenance
Four Ice Road Sloops	Transport of fuel and drilling equipment
Two Skidded Drill Shacks	Drill rig compartments
One Covered Rod Sloop	Operational for rod storage
One Skidded Drill Pump Shack	Pumping and storing drilling media
Two Settling Tanks	Drilling fluid recovery
Drill Rods and Casing	Drilling equipment
Various pumps, hoses, fittings	Components to repair burnt equipment
One 2015 Tundra sport 550F Skidoos	Local personnel transport
One 2015 CAN-AM Outlander L450 Quad	Going In for local transport
One Sea-Can Containers	Tool and equipment storage
One 60 Kw Stamford Generator (72 KVA Cummins engine)	Camp electrical supply
One TI7000 LXH Diesel Generator	Camp electrical supply
One TP8000 LXH Gas Generator	Drill core cutting electricity
One EP2500CX1 Honda Generator	Mobile electrical supply
One Down-hole IP Geophysical Instrument	Down-hole IP survey during drilling
Six Spill Kits	Mandatory spill remediation
First Aid Kit	On-site medical treatment
Propane-fired incinerator	Incinerate combustible garbage on site

**RESPONSE ORGANIZATION**


In the case of a hazardous material spill under guideline levels, the following steps will be taken:

1. Awareness of spill potential by regular inspections of the storage areas.
2. Identify the hazardous material.
3. Evaluate personal safety and degree of threat to the environment.
4. Contractors and/or company staff on site will notify camp manager.
5. Determine if spill is within or over guideline levels.
6. Contain the spill from expanding into water systems.
7. Document spill details for company records and inspectors.
8. Notify head office as part of daily progress report.
9. Head office will keep a record of hazardous spill events.

In case of a hazardous material spill over the guideline levels, the following steps will be taken:

1. Proceed with steps 1 to 5 above.
2. Stop and/or contain the spill if possible.
3. Take steps to restrict spill from water bodies and sensitive environments.
4. Notify the NWT 24 hour Spill Report Line at 867-920-8130.
5. Notify company head office at 780-416-7525.
6. Recover and clean up as much hazardous material as possible.



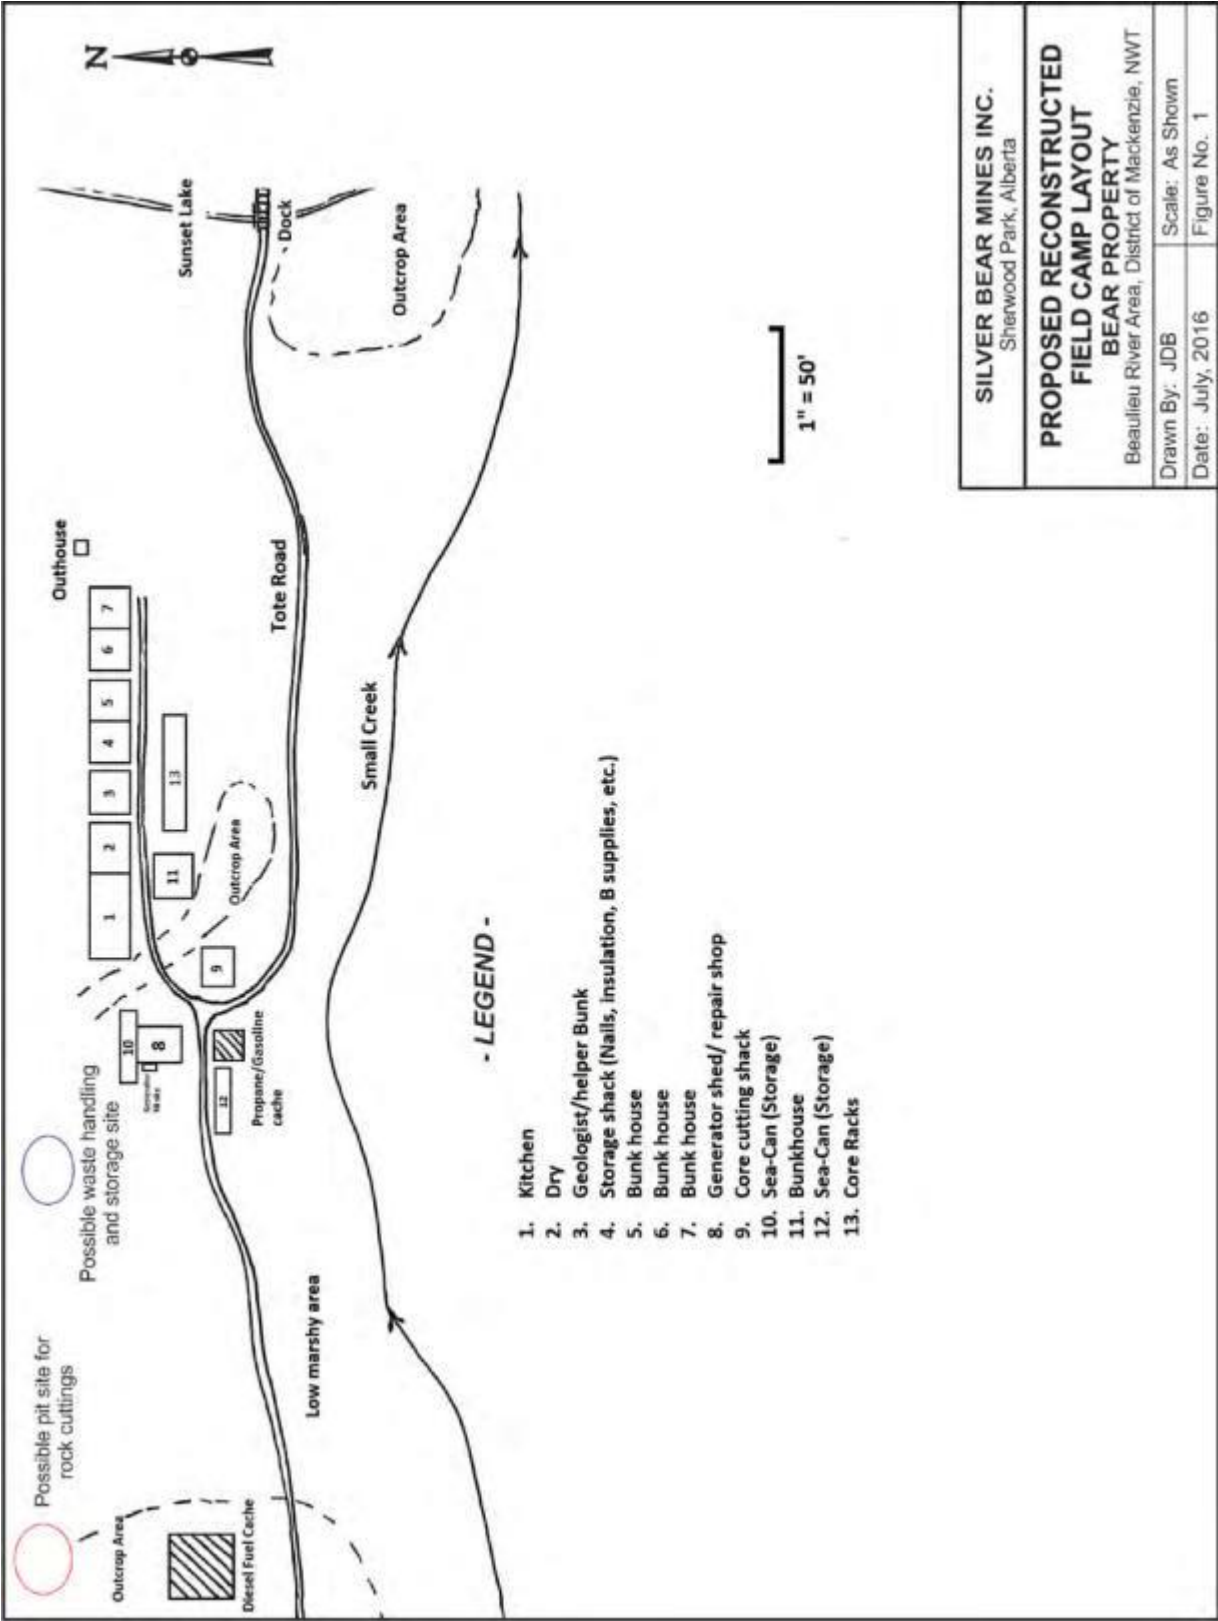

## ACTION PLAN

**Table 1:** List of hazardous materials, potential discharge sites, potential discharge volumes (worst case scenario) and direction of potential discharge

Material (sources)	Potential Discharge Event	Discharge Volume (worst case)	Direction of Potential Discharge
<b>Diesel fuel</b> -generator - oil stoves -drill rigs	- equipment refueling - leaking oil stove connection -damaged fuel drum -fuel drums leaking	Under 210L-1drum ( max. 5280 L)	Toward stream from fuel storage site and/or drill site by underground seepage along bedrock interface.
<b>Gasoline</b> - ATVs -snow machines -outboard motor	-equipment refueling -leaking rotary pump - damaged fuel drum -fuel drums leaking	Under 210L-1drum (max-2100 L)	On flat ground- toward stream by underground seepage along bedrock interface.
<b>Propane</b> - kitchen stove, water heater	-leak during connection to the stove. - valve not closed tightly at storage site. -puncture of cylinder in/outside storage area	-under 45kg (100lb)-1 cylinder -(630 kg- 14 cylinders).	Propane would be released /dissipated into the air (migrate along the ground to low areas.) Turn off all sources of ignition.
<b>Jet B Fuel</b> - helicopter	- overfilling helicopter - leaking pump and/or hose -damaged fuel drum -fuel drums leaking	-under 210L-1drum -(max 1050L)	On flat ground- toward stream by underground seepage along bedrock interface.

**Any flammable liquid spill (diesel and/or gasoline) and compressed flammable gas (propane) over 100 litres must be reported to the NWT 24 Hour spill response line.**

## PROCEDURES

### First Person Response- Basic responsibilities

1. Assess personal safety,
2. Secure the site from safety standpoint, and
3. Stop the spill if possible.

### Camp Manager/ project geologist

1. Direct all cleanup and containment activities,
2. Assign on-site resources and direct spill response team,
3. Report to NWT 24 Hour spill response line,
4. Review spill training and exercise, and
5. Report the spill



## Spill Response Team

1. Containment,
2. Cleanup, and
3. Remediation if necessary.

## Procedure

1. Safely of personnel paramount,
2. Evaluate spill hazards and risks,
3. Remove all sources of ignition,
4. Stop the spill,
5. Shut off pump,
6. Replace cap,
7. Tip drum upright,
8. Repair leaking hole,
9. Empty damaged drum into new drum,
10. Use nearest spill kit to control the spill,
11. Advise camp manger of spill, regardless of size, and
12. Contain the spill by using spill kits, shovels to dig/build a dyke to contain the spill.

## Reporting the Spill

A major spill is defined as an accidental release of hazardous product into the natural environment that has a potential adverse impact. A minor spill is defined as any hazardous chemical spill to the natural environment that exceeds the reporting limits, does not involve highly toxic, highly reactive, or explosive chemicals, in a situation that is not life threatening and is unlikely to have a significant environmental impact. Any spill will be reported to the camp manger who will determine the scope of the spill and if it is to be reported to the **NWT 24 Hour Spill Line** at **867-920-8130**.

Report forms will be located in each spill kit, camp managers and company offices with reporting procedures. This report may be faxed or emailed to the head office.

## NWT 24 Hour Spill Line

Phone: (867) 920-8130, Fax: (867) 873-6924, Email: [spill@gov.nt.ca](mailto:spill@gov.nt.ca).

## Silver Bear Mines Inc.

Phone: (780) 416-7525, Fax: (780) 416-7500. Email: [garneth@silverbearmines.com](mailto:garneth@silverbearmines.com)

## Government of Northwest Territories, Department of Lands, North Slave Regional Office

Clint Ambrose, Manager, Resource Management Inspector

Phone: (867) 767-9188 Cell: (867) 446-0769 Email: [Clint\\_Ambrose@gov.nt.ca](mailto:Clint_Ambrose@gov.nt.ca)

## Other Important Contacts

**Indigenous and Northern Affairs Canada (INAC) Inspector-** (867) 669-2761

**Environment Canada** (867) 669-4725

**GNWT Environmental Protection Division** (867) 873-7654

**GNWT Environmental Health Office** (867) 669-8979

## **Procedures for containing and controlling spills on land, water, snow and ice**

1. Begin spill containment by determining what will be impacted by the spill,
2. Observe speed and direction of spill and causes of movement (water, wind, slope),
3. Determine best location to contain the spill- avoid water bodies, and
4. Have a contingency plan in case the spill expands beyond control due to weather conditions and topography.

### **Spills on Land**

Ensure that all measures are undertaken to avoid spills reaching open water bodies by:

#### **Dykes**

1. Constructed around the perimeter and/or down slope,
2. Ensure containment of the maximum quantity of the fuel spill,
3. Place a plastic tarp near the base of the dyke so that the spill will pool up and can be removed by absorbent material and/or pumped out into barrels.

#### **Trenches**

1. May be dug if not restricted by permafrost,
2. Dig the trench to bedrock or permafrost as a containment layer, and
3. Recover spill by absorbent material and/or a pump into barrels.

### **Spills on Water**

This is the most serious type of spill and all measures need to be taken to contain spills on open water.

#### **Booms**

1. Released from the shore to circle the spill,
2. May also be used in a stream if set at an angle to the current,
3. Booms will float and have absorbent material built into them, and
4. Surface fuel remaining will need to be recovered using absorbent pads and placed into plastic bags and/or barrels.

#### **Weirs**

1. Wood material is placed such that the water can still flow under the weir and the spill will be contained and collected by absorbent material, and
2. Contaminated material will be put into plastic bags and/or barrels and removed to collection site.

#### **Barriers**

1. Are similar to the weir system with absorbent materials replaced more often.

It may be appropriate to burn the fuel spill or let the volatiles evaporate after containment. This must be done with the approval from the INAC or agency inspector.

## Containment of Spills on Ice

**Spills** on ice are generally the easiest to contain due to the impermeable nature of the ice. Absorbent material should work best on small spills. Remaining contaminated ice and slush should be scraped and shoveled into a plastic bag or barrel. It is imperative that the containment is done quickly as it cannot be recovered if it seeps under the ice.

**Dykes** made by collecting surrounding snow, compacting it, and mounding it to form a dyke down slope from the spill. A plastic tarp may assist in pooling the spill near the base of the dyke.

**Trenches** should be dug only if the ice is thick to prevent seepage into the water. The trench will be close to the spill which will allow it to pool in the trench for collection with pumps and/or absorbent material.

**Burning** should only be considered if other approaches are not feasible and requires the permission of the INAC or lead agency inspector.

## Containment of Spills on Snow

Snow is a natural absorbent and spilled fuel can be more easily contained and recovered. Contaminated snow will be shoveled into plastic bags and/or barrels and stored in a safe, approved location.

### Dykes

As with spills on ice, a snow berm down slope from the spill will contain the flow and if the spill is large, a plastic tarp can be placed over the berm so that the spill will pool at the bottom of the dyke. The contaminated snow will then be shoveled into plastic bags and/or barrels along with absorbent material and stored in an approved location.

## Worst case scenario

If a spill exceeds the freeboard of the dyke, another trench or collection pit would be created downstream of the overflow and using plastic sheeting if possible to prevent access to any water system. Hand tools such as shovels and rakes will be available at the spill kit locations. The spill will then continue to be cleaned up using absorbent pads and put into plastic bags and/or barrels.

## Procedures for transferring, storing and managing spill related wastes

Used sorbent material will be placed in plastic bags for future disposal at an approved disposal facility. At the Property, this will require double bagging, issuing a generator number as required by the air carrier, and later safe disposal in Yellowknife.

## Procedures for restoring affected areas

If a spill of reportable size occurs, a consultant with the INAC or lead agency inspector (Clint Ambrose) will check out the report and determine the level of restoration required. This may include replacement of soil and vegetation.

## On-site Resources

Spill kits will be located at the fuel storage and refueling locations as indicated in Figure 1. There is currently on site a Model 500 diesel bulldozer with backhoe, shovels and 2-mil plastic sheeting that is also used as vapor barrier.

On-line research has indicated that the camp requires specific locations for:

- Tyvek splash suits
- Chemical master gloves
- Oil only mats
- Sorbent socks
- Sorbent pads
- Large tarps
- Duct tape
- Utility knife
- Field note book and pencil
- Rake
- Pick axe
- Aluminum scoop shovels
- Instruction manual

When the camp is in operation the following equipment is available:

- Model 500 diesel bull dozer with backhoe
- Two all-terrain vehicles
- Three snow machines
- One zodiac boat with motor (available during spring and summer field work)
- Two transfer hoses with hand-operated toggle pumps - one for gas, one for diesel fuel
- Tool kit

## Off-site Resources

- Silver Bear Mines Inc.- 780-416-7525
- Resource Management Officers – Clint Ambrose (867) 446-0769 and Karine Gignac (867) 767-9187 Ext. 24189
- NWT 24-Hour spill line- 867-920-8130
- INAC inspector- 867-669-2761
- Environment Canada – 867-669-4725
- GNWT Environmental Protection Division. - 867-873-7654
- GNWT Environmental Health Office- 867- 669-8979
- RCMP (Yellowknife) 867-669-111
- Medivac (Yellowknife) - 867-669-4115
- Great Slave Helicopters (Yellowknife) 867-873-2081
- Air Tindi (Yellowknife) -867-669-8218 or 669-8200
- Discovery Mine Services- 867-920-4600

Because of the remoteness of the camp site and the amount of hazardous material stored on site, planning for an emergency situation is imperative. An employee and contractor training program is outlined below. The following are the key steps in the program:

1. All individuals entering the site are required to participate in an orientation program.
2. During the session, all locations of the spill plan and spill kits are provided on a hard copy map.
3. An overview of the plan is provided by the camp manager so all aspects are understood.
4. Specific training sessions will be scheduled so individuals directly involved in handling hazardous materials will know the steps to be undertaken to prevent a spill, clean up a spill and the proper use of the spill kits.
5. All employees and contractors are required to have their basic first aid and WHMIS training.
6. Supervisors are required to have advanced level first aid training as well as transport of dangerous goods training.

### **Training Schedule and Record Keeping**

A spreadsheet is kept at the camp and head office indicating training taken and expiry dates of specific training. Materials located on site considered hazardous that require application of the above training are:

- Diesel
- Jet B
- Gasoline
- Propane
- Used oil

### **Construction of Berms**

When the Company stores more fuel on site two berms will be constructed, one for diesel and one for gasoline as shown on Figure 1. The dimensions of each will be 3 m x 4 m with 30 cm high perimeter and underlain with impervious membrane. The berms will be covered with spaced 2 x 6's to protect the membrane and give a level operating surface. Gasoline will be located at the point of use for the quads and snow machines, and the diesel will be adjacent to the generator shed for refueling. Each will have the appropriate spill kit available for quick response.

Any undestroyed Jet B fuel presently in the camp was brought in during the 2004 airborne survey. Thus, it is too old for helicopter use and it will be mixed with diesel fuel for heating purposes. The diesel fuel will be used for the heavy equipment and drilling rigs during winter program.

### **Attachments**

**Appendix A** NT-NU Spill Report Form

**Appendix B** Material Safety Data Sheets

**Appendix C** Immediately Reportable Spill Quantities

## **APPENDIX A**

### **NT-NU Spill Report Form**



Canada

**NT-NU SPILL REPORT**

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

**NT-NU 24-HOUR SPILL REPORT LINE**

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca

**REPORT LINE USE ONLY**

<b>A</b>	REPORT DATE: MONTH – DAY – YEAR		REPORT TIME		<input type="checkbox"/> ORIGINAL SPILL REPORT, OR <input type="checkbox"/> UPDATE # _____ TO THE ORIGINAL SPILL REPORT	<b>REPORT NUMBER</b> _____
	<b>B</b> OCCURRENCE DATE: MONTH – DAY – YEAR		OCCURRENCE TIME			
<b>C</b>	LAND USE PERMIT NUMBER (IF APPLICABLE)			WATER LICENCE NUMBER (IF APPLICABLE)		
<b>D</b>	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM NAMED LOCATION				REGION	
					<input type="checkbox"/> NWT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT JURISDICTION OR OCEAN	
<b>E</b>	LATITUDE			LONGITUDE		
	DEGREES	MINUTES	SECONDS	DEGREES	MINUTES	SECONDS
<b>F</b>	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION			
<b>G</b>	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION			
<b>H</b>	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
<b>I</b>	SPILL SOURCE		SPILL CAUSE		AREA OF CONTAMINATION IN SQUARE METRES	
<b>J</b>	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED		HAZARDS TO PERSONS, PROPERTY OR ENVIRONMENT	
<b>K</b>	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS					
<b>L</b>	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE	
<b>M</b>	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE	
<b>REPORT LINE USE ONLY</b>						
<b>N</b>	RECEIVED AT SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLED	REPORT LINE NUMBER	
		STATION OPERATOR		YELLOWKNIFE, NT	(867) 920-8130	
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED	
AGENCY		CONTACT NAME		CONTACT TIME		REMARKS
LEAD AGENCY						
FIRST SUPPORT AGENCY						
SECOND SUPPORT AGENCY						
THIRD SUPPORT AGENCY						

### Instructions for Completing the NT-NU Spill Report Form

This form can be filled out electronically and faxed to the spill line at 867-873-6924. Commencing on January 2, 2007, the form can also be e-mailed as an attachment to [spills@gov.nt.ca](mailto:spills@gov.nt.ca). Until further notice, please verify receipt of e-mail transmissions with a follow-up telephone call. Spills can still be phoned in by calling collect at 867-920-8130.

<b>A. Report Date/Time</b>	The actual date and time that the spill was reported to the spill line. If the spill is phoned in, the Spill Line will fill this out. <b>Please do not fill in the Report Number:</b> the spill line will assign a number after the spill is reported.
<b>B. Occurrence Date/Time</b>	Indicate, to the best of your knowledge, the exact date and time that the spill occurred. Not to be confused with the report date and time (see above).
<b>C. Land Use Permit Number / Water Licence Number</b>	This only needs to be filled in if the activity has been licenced by the Nunavut Water Board and/or if a Land Use Permit has been issued. Applies primarily to mines and mineral exploration sites.
<b>D. Geographic Place Name</b>	In most cases, this will be the name of the city or town in which the spill occurred. For remote locations – outside of human habitations – identify the most prominent geographic feature, such as a lake or mountain and/or the distance and direction from the nearest population center. <b>You must include the geographic coordinates</b> (Refer to Section E).
<b>E. Geographic Coordinates</b>	This only needs to be filled out if the spill occurred outside of an established community such as a mine site. Please note that the location should be stated in degrees, minutes and seconds of Latitude and Longitude.
<b>F. Responsible Party Or Vessel Name</b>	This is the person who was in management/control/ownership of the substance at the time that it was spilled. In the case of a spill from a ship/vessel, include the name of the ship/vessel. Please include full address, telephone number and e-mail. Use box K if there is insufficient space. <b>Please note that, the owner of the spilled substance is ultimately responsible for any spills of that substance, regardless of who may have actually caused the spill.</b>
<b>G. Contractor involved?</b>	Were there any other parties/contractors involved? An example would be a construction company who is undertaking work on behalf of the owner of the spilled substance and who may have contributed to, or directly caused the spill and/or is responding to the spill.
<b>H. Product Spilled</b>	Identify the product spilled; most commonly, it is gasoline, diesel fuel or sewage. For other substances, avoid trade names. Wherever possible, use the chemical name of the substance and further, identify the product using the four digit UN number (eg: UN1203 for gasoline; UN1202 for diesel fuel; UN1863 for Jet A & B)
<b>I. Spill Source</b>	Identify the source of the spill: truck, ship, home heating fuel tank and, if known, the cause (eg: fuel tank overfill, leaking tank; ship ran aground; traffic accident, vandalism, storm, etc.). Provide an estimate of the extent of the contaminated/impacted area (eg: 10 m <sup>2</sup> )
<b>J. Factors Affecting Spill</b>	Any factors which might make it difficult to clean up the spill: rough terrain, bad weather, remote location, lack of equipment. Do you require advice and/or assistance with the cleanup operation? Identify any hazards to persons, property or equipment: for example, a gasoline spill beside a daycare centre would pose a safety hazard to children. Use box K if there is insufficient space.
<b>K. Additional Information</b>	Provide any additional, pertinent details about the spill, such as any peculiar/unique hazards associated with the spilled material. State what action is being taken towards cleaning up the spill; disposal of spilled material; notification of affected parties. If necessary, append additional sheets to the spill report. Number the pages in the same format found in the lower right hand corner of the spill form: eg. "Page 1 of 2", "Page 2 of 2" etc. <b>Please number the pages to ensure that recipients can be certain that they received all pertinent documents.</b> If only the spill report form was filled out, number the form as "Page 1 of 1".
<b>L. Reported to Spill Line by</b>	Include your full name, employer, contact number and the location from which you are reporting the spill. Use box K if there is insufficient space.
<b>M. Alternate Contact</b>	Identify any alternate contacts. This information assists regulatory agencies to obtain additional information if they cannot reach the individual who reported the spill.
<b>N. Report Line Use Only</b>	<b>Leave Blank.</b> This box is for the Spill Line's use only.



## **APPENDIX B**

### **Material Safety Data Sheets**

# Material Safety Data Sheet



DIESEL FUEL



## 1 . Product and company identification

<b>Product name</b>	: DIESEL FUEL
<b>Synonym</b>	: Seasonal Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, D50, D60, P40, P50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel, Furnace special, Biodiesel blend, B1, B2, B5, Diesel Low Cloud (LC).
<b>Code</b>	: W104, W293; SAP: 120, 121, 122, 125, 126, 129, 130, 135, 287, 288
<b>Material uses</b>	: Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.
<b>Manufacturer</b>	: PETRO-CANADA P.O. Box 2844 150 –6th Avenue South-West Calgary, Alberta T2P 3E3
<b><u>In case of emergency</u></b>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

## 2 . Hazards identification

<b>Physical state</b>	: Bright oily liquid.
<b>Odour</b>	: Mild petroleum oil like.
<b>WHMIS (Canada)</b>	:   Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F). Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).
<b>OSHA/HCS status</b>	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
<b>Emergency overview</b>	: WARNING! COMBUSTIBLE LIQUID AND VAPOUR. CAUSES EYE AND SKIN IRRITATION. Combustible liquid. Severely irritating to the skin. Irritating to eyes. Keep away from heat, sparks and flame. Do not get in eyes. Avoid breathing vapour or mist. Avoid contact with skin and clothing. Use only with adequate ventilation. Wash thoroughly after handling.
<b>Routes of entry</b>	: Dermal contact. Eye contact. Inhalation. Ingestion.
<b><u>Potential acute health effects</u></b>	
<b><u>Inhalation</u></b>	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
<b><u>Ingestion</u></b>	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
<b><u>Skin</u></b>	: Severely irritating to the skin.
<b><u>Eyes</u></b>	: Irritating to eyes.
<b><u>Potential chronic health effects</u></b>	
<b><u>Chronic effects</u></b>	: No known significant effects or critical hazards.
<b><u>Carcinogenicity</u></b>	: Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).
<b><u>Mutagenicity</u></b>	: No known significant effects or critical hazards.
<b><u>Teratogenicity</u></b>	: No known significant effects or critical hazards.

## 2 . Hazards identification

- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.
- Medical conditions aggravated by over-exposure** : Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.

See toxicological information (section 11)

## 3 . Composition/information on ingredients

	<u>CAS number</u>	<u>%</u>
Kerosine (petroleum), hydrodesulfurized / Fuels, diesel / Fuel Oil No. 2 <u>Name</u>	64742-81-0 / 68334-30-5 / 68476-30-2	95 - 100
Fatty acids methyl esters	61788-61-2 / 67784-80-9 / 73891-99-3	0 - 5

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

## 4 . First-aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

## 5 . Fire-fighting measures

- Flammability of the product** : Combustible liquid

### Extinguishing media

- Suitable** : Use dry chemical, CO<sub>2</sub>, water spray (fog) or foam.
- Not suitable** : Do not use water jet.

- Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

- Products of combustion** : Carbon oxides (CO, CO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), sulphur oxides (SO<sub>x</sub>), sulphur compounds (H<sub>2</sub>S), smoke and irritating vapours as products of incomplete combustion.

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

## 5 . Fire-fighting measures

- Special remarks on fire hazards** : Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Runoff to sewer may create fire or explosion hazard.

## 6 . Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**
- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

## 7 . Handling and storage

- Handling** : Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

## 8 . Exposure controls/personal protection

### Ingredient

Kerosine (petroleum), hydrodesulfurized

Fuels, diesel

Fuel oil No. 2

### Exposure limits

**ACGIH TLV (United States). Absorbed through skin.**

TWA: 200 mg/m<sup>3</sup> 8 hour(s).

**ACGIH TLV (United States). Absorbed through skin.**

TWA: 100 mg/m<sup>3</sup>, (Inhalable fraction and vapour) 8 hour(s).

**ACGIH TLV (United States). Absorbed through skin.**

TWA: 100 mg/m<sup>3</sup>, (Inhalable fraction and vapour) 8 hour(s).

**Consult local authorities for acceptable exposure limits.**

### Recommended monitoring procedures

- : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

### Engineering measures

- : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

### Hygiene measures

- : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

### Personal protection

#### Respiratory

- : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

#### Hands

- : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.  
Recommended: nitrile, neoprene, polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

#### Eyes

- : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

#### Skin

- : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

#### Environmental exposure controls

- : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.



## 9 . Physical and chemical properties

<b>Physical state</b>	: Bright oily liquid.
<b>Flash point</b>	: Diesel fuel: Closed cup: $\geq 40^{\circ}\text{C}$ ( $\geq 104^{\circ}\text{F}$ ) Marine Diesel Fuel: Closed Cup: $\geq 60^{\circ}\text{C}$ ( $\geq 140^{\circ}\text{F}$ ) Mining Diesel: Closed Cup: $\geq 52^{\circ}\text{C}$ ( $\geq 126^{\circ}\text{F}$ )
<b>Auto-ignition temperature</b>	: $225^{\circ}\text{C}$ ( $437^{\circ}\text{F}$ )
<b>Flammable limits</b>	: Lower: 0.7% Upper: 6%
<b>Colour</b>	: Clear to yellow (This product may be dyed red for taxation purposes).
<b>Odour</b>	: Mild petroleum oil like.
<b>Odour threshold</b>	: Not available.
<b>pH</b>	: Not available.
<b>Boiling/condensation point</b>	: $150$ to $371^{\circ}\text{C}$ ( $302$ to $699.8^{\circ}\text{F}$ )
<b>Melting/freezing point</b>	: Not available.
<b>Relative density</b>	: $0.80$ to $0.88$ kg/L @ $15^{\circ}\text{C}$ ( $59^{\circ}\text{F}$ )
<b>Vapour pressure</b>	: $1$ kPa ( $7.5$ mm Hg) @ $20^{\circ}\text{C}$ ( $68^{\circ}\text{F}$ ).
<b>Vapour density</b>	: $4.5$ [Air = $1$ ]
<b>Volatility</b>	: Semivolatile to volatile.
<b>Evaporation rate</b>	: Not available.
<b>Viscosity</b>	: Diesel fuel: $1.3$ - $4.1$ cSt @ $40^{\circ}\text{C}$ ( $104^{\circ}\text{F}$ ) Marine Diesel Fuel: $1.3$ - $4.4$ cSt @ $40^{\circ}\text{C}$ ( $104^{\circ}\text{F}$ )
<b>Pour point</b>	: Not available.
<b>Solubility</b>	: Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

## 10 . Stability and reactivity

<b>Chemical stability</b>	: The product is stable.
<b>Hazardous polymerisation</b>	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
<b>Materials to avoid</b>	: Reactive with oxidising agents and acids.
<b>Hazardous decomposition products</b>	: May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition.

## 11 . Toxicological information

### Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Kerosine (petroleum), hydrodesulfurized	LD50 Dermal	Rabbit	$>2000$ mg/kg	-
	LD50 Oral	Rat	$>5000$ mg/kg	-
	LC50 Inhalation Vapour	Rat	$>5000$ mg/m <sup>3</sup>	4 hours
Fuels, diesel	LD50 Dermal	Mouse	$24500$ mg/kg	-
Fuel oil No. 2	LD50 Oral	Rat	$7500$ mg/kg	-
	LD50 Oral	Rat	$12000$ mg/kg	-

**Conclusion/Summary** : Not available.

### Chronic toxicity

**Conclusion/Summary** : Not available.

### Irritation/Corrosion

**Conclusion/Summary** : Not available.

### Sensitiser

**Conclusion/Summary** : Not available.

### Carcinogenicity

**Conclusion/Summary** : Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).





## 11 . Toxicological information

### Classification

	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Kerosine (petroleum), hydrodesulfurized	A3	-	-	-	-	-
Product/ingredient name	A3	3	-	-	-	-
Fuels, diesel	A3	3	-	-	-	-
Fuel oil No. 2						

### Mutagenicity

**Conclusion/Summary** : Not available.

### Teratogenicity

**Conclusion/Summary** : Not available.

### Reproductive toxicity

**Conclusion/Summary** : Not available.

## 12 . Ecological information

**Environmental effects** : No known significant effects or critical hazards.

### Aquatic ecotoxicity

**Conclusion/Summary** : Not available.

### Biodegradability

**Conclusion/Summary** : Not available.

## 13 . Disposal considerations

**Waste disposal** : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

## 14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
------------------------	-----------	----------------------	---------	-----	-------	------------------------

<b>TDG Classification</b>	UN1202	DIESEL FUEL	3			
---------------------------	--------	-------------	---	--	--	--



<b>DOT Classification</b>	Not available.	Not available.	Not available.	-	-
---------------------------	----------------	----------------	----------------	---	---

PG\* : Packing group

## 15 . Regulatory information

### United States

**HCS Classification** : Combustible liquid  
Irritating material

### Canada

**WHMIS (Canada)** : Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).  
Class D-2A: Material causing other toxic effects (Very toxic).  
Class D-2B: Material causing other toxic effects (Toxic).



## 15 . Regulatory information

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

### International regulations

- Canada inventory** : All components are listed or exempted.  
**United States inventory (TSCA 8b)** : All components are listed or exempted.  
**Europe inventory** : All components are listed or exempted.


## 16 . Other information

- Label requirements** : COMBUSTIBLE LIQUID AND VAPOUR. CAUSES EYE AND SKIN IRRITATION.

**Hazardous Material Information System (U.S.A.)**

Health	2
Flammability	2
Physical hazards	0
Personal protection	H

**National Fire Protection Association (U.S.A.)**

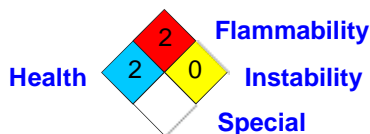

**References**

- : Available upon request.  
 ™ Trademark of Suncor Energy Inc. Used under licence.

**Date of printing** : 7/6/2010.

**Date of issue** : 6 July 2010

**Date of previous issue** : 7/3/2009.

**Responsible name** : Product Safety - JDW

Indicates information that has changed from previously issued version.

**For Copy of (M)SDS** : Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

### Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



# Material Safety Data Sheet

2-CYCLE MOTOR OIL



## 1 . Product and company identification

<b>Product name</b>	: 2-CYCLE MOTOR OIL
<b>Code</b>	: TWOCYC, 460-401
<b>Material uses</b>	: A low ash 2-cycle engine oil designed to lubricate conventional pre-mixed fuel/oil as well as oil injection lubricated engines powering air-cooled two-stroke cycle engines.
<b>Manufacturer</b>	: Petro-Canada Lubricants Inc. 2310 Lakeshore Road West Mississauga, Ontario Canada L5J 1K2
<b><u>In case of emergency</u></b>	: Suncor Energy: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

## 2 . Hazards identification

<b>Physical state</b>	: Viscous liquid.
<b>Odor</b>	: Mild petroleum oil like.
<b>WHMIS (Canada)</b>	: Not controlled under WHMIS (Canada).
<b>OSHA/HCS status</b>	: While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this MSDS contains valuable information critical to the safe handling and proper use of the product. This MSDS should be retained and available for employees and other users of this product.
<b>Emergency overview</b>	: No specific hazard.
<b>Routes of entry</b>	: Dermal contact. Eye contact. Inhalation. Ingestion.
<b><u>Potential acute health effects</u></b>	
<b>Inhalation</b>	: No known significant effects or critical hazards.
<b>Ingestion</b>	: No known significant effects or critical hazards.
<b>Skin</b>	: Slightly irritating to the skin.
<b>Eyes</b>	: Slightly irritating to the eyes.
<b><u>Potential chronic health effects</u></b>	
<b>Chronic effects</b>	: No known significant effects or critical hazards.
<b>Carcinogenicity</b>	: Not listed as carcinogenic by OSHA, NTP or IARC.
<b>Mutagenicity</b>	: No known significant effects or critical hazards.
<b>Teratogenicity</b>	: No known significant effects or critical hazards.
<b>Developmental effects</b>	: No known significant effects or critical hazards.
<b>Fertility effects</b>	: No known significant effects or critical hazards.
<b>Medical conditions aggravated by over-exposure</b>	: Repeated or prolonged contact with spray or mist may produce chronic eye irritation and severe skin irritation. Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

## 3 . Composition/information on ingredients

<b><u>Name</u></b>	<b><u>CAS number</u></b>	<b><u>%</u></b>
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	Mixture	-

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

### 3 . Composition/information on ingredients

The base oil may be a mixture of the following CAS#s: 8042-47-5, 64741-95-3, 64742-01-4, 64742-46-7, 64742-47-8, 64742-53-6, 64742-54-7, 64742-55-8, 64742-62-7, 72623-83-7, 72623-84-8, 72623-85-9, 72623-86-0, 72623-87-1, 178603-64-0, 178603-65-1, 178603-66-2, 445411-73-4

### 4 . First aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognized skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

### 5 . Fire-fighting measures

- Flammability of the product** : May be combustible at high temperature.
- Extinguishing media**
- Suitable** : Use an extinguishing agent suitable for the surrounding fire.
- Not suitable** : None known.
- Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.
- Products of combustion** : Carbon oxides (CO, CO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), sulphur oxides (SO<sub>x</sub>), asphyxiants, hydrocarbon fragments, smoke and irritating vapours as products of incomplete combustion.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
- Special remarks on fire hazards** : Low fire hazard. This material must be heated before ignition will occur.
- Special remarks on explosion hazards** : Do not pressurize, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

### 6 . Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

#### Methods for cleaning up

## 6 . Accidental release measures

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

## 7 . Handling and storage

- Handling** : Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapor or mist. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

## 8 . Exposure controls/personal protection

### Ingredient

Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).

### Exposure limits

**ACGIH TLV (United States). Notes: (oil mist)**

TWA: 5 mg/m<sup>3</sup> 8 hour(s).

STEL: 10 mg/m<sup>3</sup> 15 minute(s).

**Consult local authorities for acceptable exposure limits.**

- Recommended monitoring procedures** : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.
- Engineering measures** : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants. If this product contains ingredients with exposure limits, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure below any recommended or statutory limits.
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Personal protection**
- Respiratory** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapor filter
- Hands** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.  
Recommended: neoprene, nitrile, polyvinyl alcohol (PVA), Viton.

## 8 . Exposure controls/personal protection

<b>Eyes</b>	: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.
<b>Skin</b>	: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
<b>Environmental exposure controls</b>	: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

## 9 . Physical and chemical properties

<b>Physical state</b>	: Viscous liquid.
<b>Flash point</b>	: Open cup: 152°C (305.6°F) [Cleveland.]
<b>Auto-ignition temperature</b>	: Not available.
<b>Flammable limits</b>	: Not available.
<b>Color</b>	: Blue-green.
<b>Odor</b>	: Mild petroleum oil like.
<b>Odor threshold</b>	: Not available.
<b>pH</b>	: Not available.
<b>Boiling/condensation point</b>	: Not available.
<b>Melting/freezing point</b>	: Not available.
<b>Relative density</b>	: 0.88 kg/L @ 15°C (59°F)
<b>Vapor pressure</b>	: Not available.
<b>Vapor density</b>	: Not available.
<b>Volatility</b>	: Not available.
<b>Evaporation rate</b>	: Not available.
<b>Viscosity</b>	: 20.9 cSt @ 40°C (104°F), 4.5 cSt @ 100°C (212°F), VI=132
<b>Pour point</b>	: -57°C (-71°F)
<b>Solubility</b>	: Insoluble in water.

## 10 . Stability and reactivity

<b>Chemical stability</b>	: The product is stable.
<b>Hazardous polymerization</b>	: Under normal conditions of storage and use, hazardous polymerization will not occur.
<b>Materials to avoid</b>	: Reactive with oxidizing agents, reducing agents, alkalis and acids.
<b>Hazardous decomposition products</b>	: May release COx, NOx, SOx, aldehydes, methacrylate monomers, asphyxiants, hydrocarbon fragments, smoke and irritating vapours when heated to decomposition.

## 11 . Toxicological information

### Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>2500 mg/m <sup>3</sup>	4 hours
	Dusts and mists			

**Conclusion/Summary** : Not available.

### Chronic toxicity

**Conclusion/Summary** : Not available.





## 11 . Toxicological information

### Irritation/Corrosion

Conclusion/Summary : Not available.

### Sensitizer

Conclusion/Summary : Not available.

### Carcinogenicity

Conclusion/Summary : Not available.

### Mutagenicity

Conclusion/Summary : Not available.

### Teratogenicity

Conclusion/Summary : Not available.

### Reproductive toxicity

Conclusion/Summary : Not available.

## 12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

### Aquatic ecotoxicity

Conclusion/Summary : Not available.

### Biodegradability

Conclusion/Summary : Not available.

Other adverse effects : No known significant effects or critical hazards.

## 13 . Disposal considerations

**Waste disposal** : The generation of waste should be avoided or minimized wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

## 14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG* Label	Additional information
TDG Classification	Not regulated.	-	-	-	-
DOT Classification	Not available.	Not available.	Not available.	-	-

PG\* : Packing group



## 15 . Regulatory information

### United States

**HCS Classification** : Not regulated.

### Canada

**WHMIS (Canada)** : Not controlled under WHMIS (Canada).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

### EU regulations

**Risk phrases** : This product is not classified according to EU legislation.

### International regulations

**Canada inventory** : All components are listed or exempted.

**United States inventory** : All components are listed or exempted.

(TSCA 8b)

**Europe inventory** : All components are listed or exempted.

## 16 . Other information

**Hazardous Material  
Information System (U.S.A.)** :

Health	1
Flammability	1
Physical hazards	0
Personal protection	B

**National Fire Protection  
Association (U.S.A.)** :



### **References**

: Available upon request.  
™ Trademark of Suncor Energy Inc. Used under licence.

**Date of printing** : 6/9/2010.

**Date of issue** : 9 June 2010

**Date of previous issue** : 4/9/2009.

**Responsible name** : Product Safety - DSR

Indicates information that has changed from previously issued version.

**For Copy of (M)SDS** : Internet: [lubricants.petro-canada.ca/msds](http://lubricants.petro-canada.ca/msds)

Telephone: 1-800-268-5850; Fax: 1-800-201-6285

For Product Safety Information: (905) 804-4752

### Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



# Material Safety Data Sheet

PROPANE



## 1 . Product and company identification

<b>Product name</b>	: PROPANE
<b>Synonym</b>	: Propane HD-5, Propane commercial, Liquefied Petroleum Gas (LPG), C3H8, CGSB Propane Grade 1, CGSB Propane Grade 2, odourized propane, stench propane, automotive propane.
<b>Code</b>	: W222
<b>Material uses</b>	: Propane is used as a fuel gas, refrigerant and as a raw material for organic synthesis. It is also used as a laboratory gas. The grade determines the propane content. It is supplied as pressurized liquid in tanks.
<b>Manufacturer</b>	: PETRO-CANADA P.O. Box 2844 150 –6th Avenue South-West Calgary, Alberta T2P 3E3
<b><u>In case of emergency</u></b>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

## 2 . Hazards identification

<b>Physical state</b>	: Gas at room temperature; liquid when stored under pressure.
<b>Odour</b>	: Propane is an odourless gas. Odourized propane will contain up to 28 g Ethyl Mercaptan per 1000 L of propane.
<b>WHMIS (Canada)</b>	: Class A: Compressed gas. Class B-1: Flammable gas.
<b>OSHA/HCS status</b>	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
<b>Emergency overview</b>	: CAUTION!  EXTREMELY FLAMMABLE GAS. MAY CAUSE FLASH FIRE. HIGH PRESSURE GAS. Contains gas under pressure. Extremely flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst or explode. Keep away from heat, sparks and flame. Do not puncture or incinerate container. Avoid breathing gas. Avoid contact with skin and clothing. Use only with adequate ventilation. Keep container tightly closed and sealed until ready for use. At high concentrations, can displace oxygen and cause asphyxiation. A minimum requirement of 19.5% of oxygen at sea level (148 torr O2, dry air) is recommended.
<b>Routes of entry</b>	: Dermal contact. Eye contact. Inhalation.
<b><u>Potential acute health effects</u></b>	
<b>Inhalation</b>	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
<b>Ingestion</b>	: As this product is a gas, refer to the inhalation section.
<b>Skin</b>	: Contact with rapidly expanding gas may cause burns or frostbite.
<b>Eyes</b>	: Contact with rapidly expanding gas may cause burns or frostbite.
<b><u>Potential chronic health effects</u></b>	
<b>Chronic effects</b>	: No known significant effects or critical hazards.
<b>Carcinogenicity</b>	: Not listed as carcinogenic by OSHA, NTP or IARC.
<b>Mutagenicity</b>	: No known significant effects or critical hazards.
<b>Teratogenicity</b>	: No known significant effects or critical hazards.
<b>Developmental effects</b>	: No known significant effects or critical hazards.
<b>Fertility effects</b>	: No known significant effects or critical hazards.

## 2 . Hazards identification

**Medical conditions aggravated by over-exposure** : Overexposure may lead to cardiac sensitization.

See toxicological information (section 11)

## 3 . Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
HD-5 Propane		
Propane	74-98-6	90 - 100
Propene	115-07-1	1 - 5
Commercial Propane		
Propane	74-98-6	75 - 100
Propene	115-07-1	10 - 20
Both grades may contain:		
Ethane	74-84-0	3 - 6*
*Montreal: may vary from 0.1-2%		
Butane+	106-97-8	1 - 5

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

## 4 . First-aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : As this product is a gas, refer to the inhalation section.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

## 5 . Fire-fighting measures

**Flammability of the product** : Class I - flammable gas (NFPA).

### Extinguishing media

**Suitable** : Use an extinguishing agent suitable for the surrounding fire.

**Not suitable** : None known.

**Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Contact supplier immediately for specialist advice. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool. If involved in fire, shut off flow immediately if it can be done without risk. If this is impossible, withdraw from area and allow fire to burn. Fight fire from protected location or maximum possible distance.

**Products of combustion** : Carbon oxides (CO, CO<sub>2</sub>), smoke and irritating vapours as products of incomplete combustion.

**Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

## 5 . Fire-fighting measures

### Special remarks on fire hazards

: Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.

### Special remarks on explosion hazards

: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire. Vapour explosion hazard indoors, outdoors or in sewers. Propane may form explosive mixtures with air.

## 6 . Accidental release measures

### Personal precautions

: Accidental releases pose a serious fire or explosion hazard. Immediately contact emergency personnel. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing gas. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).

### Environmental precautions

: Ensure emergency procedures to deal with accidental gas releases are in place to avoid contamination of the environment. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

### Methods for cleaning up

#### Small spill

: Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment.

#### Large spill

: Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see section 1 for emergency contact information and section 13 for waste disposal.

## 7 . Handling and storage

### Handling

: Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Contains gas under pressure. Avoid contact with eyes, skin and clothing. Avoid breathing gas. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Empty containers retain product residue and can be hazardous. Do not puncture or incinerate container.

SPECIAL PRECAUTIONS: Sludges and tank scale from petroleum storage tanks, trucks, rail cars, and filters/screens may contain naturally occurring radioactive material ("NORM") in the dominant form of radon 226. Similarly, equipment used for the transfer of petroleum product such as pipelines, pumps and compressors, may have detectable levels of radioactive radon on inner surfaces. Workers involved in cleaning, descaling, repair or other maintenance on inner surfaces of such equipment should avoid breathing and ingesting of dust generated from such activities. Suitable codes of practice should be developed for these activities, detailing appropriate occupational hygiene, personal protective equipment and disposal practices.

### Storage

: Store in accordance with local regulations. Store in a segregated and approved area. Store in a dry, cool and well-ventilated area, away from incompatible materials (see section 10). Eliminate all ignition sources. Keep container tightly closed and sealed until ready for use.



## 8 . Exposure controls/personal protection

### Ingredient

### Exposure limits

Propane

**ACGIH TLV (United States).**

TWA: 1000 ppm 8 hour(s).

Propylene

**ACGIH TLV (United States).**

TWA: 500 ppm 8 hour(s).

Ethane

**ACGIH TLV (United States).**

TWA: 1000 ppm 8 hour(s).

Butane

**ACGIH TLV (United States).**

TWA: 1000 ppm 8 hour(s).

**Consult local authorities for acceptable exposure limits.**

### Recommended monitoring procedures

- : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

### Engineering measures

- : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

### Hygiene measures

- : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

### Personal protection

#### Respiratory

- : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: NIOSH-approved self-contained breathing apparatus.

#### Hands

- : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.  
Recommended: Wear insulated gloves to prevent frostbite.

#### Eyes

- : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

#### Skin

- : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

#### Environmental exposure controls

- : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

## 9 . Physical and chemical properties

### Physical state

Date of issue : 3/31/2009.

### Flash point

### Auto-ignition temperature

### Flammable limits

### Colour

### Odour

### Odour threshold

### pH

:  
G  
a  
s  
a  
t  
r  
o  
o  
m

temperature; liquid when stored under pressure.

: Closed cup: -104°C (-155.2°F)

: 450°C (842°F) (NFPA)

: Lower: 2.1% (NFPA)

Upper: 9.5% (NFPA)

: Colourless.

: Propane is an odourless gas. Odourized propane will contain up to 28 g Ethyl Mercaptan per 1000 L of propane.

: Not available.

: Not available.

## 9 . Physical and chemical properties

Boiling/condensation point	: -42°C (-43.6°F)
Melting/freezing point	: Not available.
Relative density	: Not available.
Vapour pressure	: 1434.9 kPa (10763 mm Hg) @ 38°C (100°F)
Vapour density	: 1.56 [Air = 1]
Volatility	: Volatile.
Evaporation rate	: Not available.
Viscosity	: Not available.
Pour Point	: Not available.
Solubility	: Not available.

## 10 . Stability and reactivity

Chemical stability	: The product is stable.
Hazardous polymerisation	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid	: Reactive with oxidising agents and halogenated compounds.
Hazardous decomposition products	: May release COx, smoke and irritating vapours when heated to decomposition.

## 11 . Toxicological information

### Acute toxicity

	Result	Species	Dose	Exposure
Butane	LC50 Inhalation Gas.	Rat	658000 mg/m <sup>3</sup>	4 hours

Product/ingredient name : Not available.

Conclusion/Summary : Not available.

Chronic toxicity Conclusion/Summary : Not available.

Irritation/Corrosion Conclusion/Summary : Not available.

Sensitiser Conclusion/Summary : Not available.

Carcinogenicity Conclusion/Summary : Not available.

Classification

ACGIH  
A4

IARC  
3

EPA

NIOSH

NTP

OSHA

Propylene

-

-

-

-

Product/ingredient name : Not available.

Mutagenicity Conclusion/Summary : Not available.

Teratogenicity Conclusion/Summary : Not available.

Reproductive toxicity

Conclusion/Summary



## 12 . Ecological information

**Environmental effects** : No known significant effects or critical hazards.

Aquatic ecotoxicity

**Conclusion/Summary** : Not available.

Biodegradability

**Conclusion/Summary** : Not available.


## 13 . Disposal considerations

**Waste disposal** : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Do not puncture or incinerate container. Empty pressure vessels should be returned to the supplier.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

## 14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
<b>TDG Classification</b>	UN1978	P R O P A N E	2	1		-
<b>DOT Classification</b>	Not available.	Not available.	Not available.	-	-	-

PG\* : Packing group

## 15 . Regulatory information

United States

**HCS Classification** : Compressed gas

Canada

**WHMIS (Canada)** : Class A: Compressed gas.  
Class B-1: Flammable gas.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

**Canada inventory** : All components are listed or exempted.

**United States inventory (TSCA 8b)** : All components are listed or exempted.

**Europe inventory** : All components are listed or exempted.

## 16 . Other information

**Label requirements** :

**Hazardous Material Information System (U.S.A.)** :

Date of issue : 3/31/2009


Health	2
Flammability	4
Physical hazards	2

K

EXTREMELY FLAMMABLE  
GAS. MAY CAUSE FLASH  
FIRE. HIGH PRESSURE  
GAS.

## 16 . Other information

National Fire Protection Association (U.S.A.) :



### References

: Available upon request.  
TM/MC Marque de commerce de Petro-Canada - Trademark

Date of printing : 7/13/2009.

Date of issue : 31 March 2009

Date of previous issue : No previous validation.

Responsible name : Product Safety - DSR

Indicates information that has changed from previously issued version.

For Copy of (M)SDS : Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

### Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

# Material Safety Data Sheet



GASOLINE, UNLEADED



## 1 . Product and company identification

<b>Product name</b>	: GASOLINE, UNLEADED
<b>Synonym</b>	: Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, TQRUL, transitional quality regular unleaded, BOB, Blendstock for Oxygenate Blending
<b>Code</b>	: W102E, SAP: 102 to 117
<b>Material uses</b>	: Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.
<b>Manufacturer</b>	: PETRO-CANADA P.O. Box 2844 150 –6th Avenue South-West Calgary, Alberta T2P 3E3
<b><u>In case of emergency</u></b>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

## 2 . Hazards identification

<b>Physical state</b>	: Clear liquid.
<b>Odour</b>	: Gasoline
<b>WHMIS (Canada)</b>	:   Class B-2: Flammable liquid Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).
<b>OSHA/HCS status</b>	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
<b>Emergency overview</b>	: WARNING!  FLAMMABLE LIQUID AND VAPOUR. CAUSES RESPIRATORY TRACT, EYE AND SKIN IRRITATION. CANCER HAZARD - CONTAINS MATERIAL WHICH CAN CAUSE CANCER. CONTAINS MATERIAL WHICH CAN CAUSE HERITABLE GENETIC EFFECTS.  Flammable liquid. Irritating to eyes, respiratory system and skin. Keep away from heat, sparks and flame. Avoid exposure - obtain special instructions before use. Do not breathe vapour or mist. Avoid contact with eyes, skin and clothing. Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure. Contains material which can cause heritable genetic effects. Use only with adequate ventilation. Keep container tightly closed and sealed until ready for use. Wash thoroughly after handling.
<b>Routes of entry</b>	: Dermal contact. Eye contact. Inhalation. Ingestion.
<b><u>Potential acute health effects</u></b>	
<b><u>Inhalation</u></b>	: Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
<b><u>Ingestion</u></b>	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.





## 2 . Hazards identification

<b>Skin</b>	: Irritating to skin.
<b>Eyes</b>	: Irritating to eyes.
<b><u>Potential chronic health effects</u></b>	
<b>Chronic effects</b>	: This product contains an ingredient or ingredients, which have been shown to cause chronic toxic effects. Repeated or prolonged exposure to the substance can produce blood disorders.
<b>Carcinogenicity</b>	: Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure.
<b>Mutagenicity</b>	: Contains material which can cause heritable genetic effects.
<b>Teratogenicity</b>	: No known significant effects or critical hazards.
<b>Developmental effects</b>	: No known significant effects or critical hazards.
<b>Fertility effects</b>	: No known significant effects or critical hazards.
<b>Medical conditions aggravated by over-exposure</b>	: Repeated or prolonged contact with spray or mist may produce chronic eye irritation and severe skin irritation. Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

## 3 . Composition/information on ingredients

<b><u>Name</u></b>	<b><u>CAS number</u></b>	<b><u>%</u></b>
Gasoline	86290-81-5	85-100
Ethanol	64-17-5	0.1-1
Benzene	71-43-2	0.5-1.5
Toluene	108-88-3	15-40*

\*Montreal: may vary from 3-40%

\*Edmonton: may vary from 1-5%

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

## 4 . First-aid measures

<b>Eye contact</b>	: Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
<b>Skin contact</b>	: In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
<b>Inhalation</b>	: Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
<b>Ingestion</b>	: Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
<b>Protection of first-aiders</b>	: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.
<b>Notes to physician</b>	: No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

## 5 . Fire-fighting measures

<b>Flammability of the product</b>	: Flammable liquid (NFPA) .
<b>Extinguishing media</b>	
<b>Suitable</b>	: Use dry chemical, CO <sub>2</sub> , water spray (fog) or foam.
<b>Not suitable</b>	: Do not use water jet.
<b>Special exposure hazards</b>	: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
<b>Products of combustion</b>	: Carbon oxides (CO, CO <sub>2</sub> ), nitrogen oxides (NO <sub>x</sub> ), polynuclear aromatic hydrocarbons, phenols, aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.
<b>Special protective equipment for fire-fighters</b>	: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
<b>Special remarks on fire hazards</b>	: Extremely flammable in presence of open flames, sparks, shocks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
<b>Special remarks on explosion hazards</b>	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.

## 6 . Accidental release measures

<b>Personal precautions</b>	: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
<b>Environmental precautions</b>	: Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
<b>Methods for cleaning up</b>	
<b>Small spill</b>	: Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
<b>Large spill</b>	: Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

## 7 . Handling and storage

<b>Handling</b>	: Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical
-----------------	---

## 7 . Handling and storage

(ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.

### Storage

- : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

## 8 . Exposure controls/personal protection

### Ingredient

### Exposure limits

Gasoline

#### ACGIH TLV (United States).

TWA: 300 ppm 8 hour(s).

STEL: 500 ppm 15 minute(s).

Ethanol

#### ACGIH TLV (United States).

STEL: 1000 ppm 15 minute(s).

Benzene

#### ACGIH TLV (United States). Absorbed through skin.

TWA: 0.5 ppm 8 hour(s).

STEL: 2.5 ppm 15 minute(s).

Toluene

#### ACGIH TLV (United States).

TWA: 20 ppm 8 hour(s).

### Consult local authorities for acceptable exposure limits.

### Recommended monitoring procedures

- : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

### Engineering measures

- : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

### Hygiene measures

- : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

### Personal protection

#### Respiratory

- : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

## 8 . Exposure controls/personal protection

- Hands** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.  
Recommended: polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.
- Eyes** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.
- Skin** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

## 9 . Physical and chemical properties

- Physical state** : Clear liquid.
- Flash point** : Closed cup: -50 to -38°C (-58 to -36.4°F) [Tagliabue.]
- Auto-ignition temperature** : 257°C (494.6°F) (NFPA)
- Flammable limits** : Lower: 1.3% (NFPA)  
Upper: 7.6% (NFPA)
- Colour** : Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
- Odour** : Gasoline
- Odour threshold** : Not available.
- pH** : Not available.
- Boiling/condensation point** : 25 to 220°C (77 to 428°F) (ASTM D86)
- Melting/freezing point** : Not available.
- Relative density** : 0.685 to 0.8 kg/L @ 15°C (59°F)
- Vapour pressure** : <107 kPa (<802.5 mm Hg) @ 37.8°C (100°F)
- Vapour density** : 3 to 4 [Air = 1] (NFPA)
- Volatility** : Not available.
- Evaporation rate** : Not available.
- Viscosity** : Not available.
- Pour point** : Not available.
- Solubility** : Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform and benzene. Dissolves fats, oils and natural resins.

## 10 . Stability and reactivity

- Chemical stability** : The product is stable.
- Hazardous polymerisation** : Under normal conditions of storage and use, hazardous polymerisation will not occur.
- Materials to avoid** : Reactive with oxidising agents, acids and interhalogens.
- Hazardous decomposition products** : May release CO<sub>x</sub>, NO<sub>x</sub>, phenols, polycyclic aromatic hydrocarbons, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.



## 11 . Toxicological information

### Acute toxicity

	Result	Species	Dose	Exposure
Gasoline	LD50 Dermal	Rabbit	>5000 mg/kg	-
	LD50 Oral	Rat	13600 mg/kg	-
<b>Product/ingredient name</b>	LD50 Dermal	Rabbit	>15800 mg/kg	-
Ethanol	LD50 Oral	Mouse	3450 mg/kg	-
	LC50 Inhalation	Rat	8850 mg/m <sup>3</sup>	4 hours
	Vapour			
Benzene	LD50 Dermal	Rabbit	>8240 mg/kg	-
	LD50 Oral	Rat	930 mg/kg	-
	LC50 Inhalation	Rat	13228 ppm	4 hours
	Vapour			
Toluene	LD50 Dermal	Rabbit	12125 mg/kg	-
	LD50 Oral	Rat	636 mg/kg	-
	LC50 Inhalation	Rat	7585 ppm	4 hours
	Vapour			

**Conclusion/Summary** : Not available.

### Chronic toxicity

**Conclusion/Summary** : Not available.

### Irritation/Corrosion

**Conclusion/Summary** : Not available.

### Sensitiser

**Conclusion/Summary** : Not available.

### Carcinogenicity

**Conclusion/Summary** : Not available.

### Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Gasoline	A3	2B	-	-	-	-
Ethanol	A3	-	-	-	-	-
Benzene	A1	1	A	+	Proven.	+
Toluene	A4	3	D	-	-	-

### Mutagenicity

**Conclusion/Summary** : Not available.

### Teratogenicity

**Conclusion/Summary** : There is a wealth of information about the teratogenic hazards of Toluene in the literature; however, based upon professional judgement regarding the body of evidence, WHMIS classification as a teratogen is not warranted.

### Reproductive toxicity

**Conclusion/Summary** : Not available.

## 12 . Ecological information

**Environmental effects** : No known significant effects or critical hazards.

### Aquatic ecotoxicity

**Conclusion/Summary** : Not available.

### Biodegradability

**Conclusion/Summary** : Not available.





## 13 . Disposal considerations

**Waste disposal** : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

## 14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
<b>TDG Classification</b>	UN1203	G A S O L I N E	3			

**DOT Classification** Not available. Not available. Not available. - -

PG\* : Packing group

## 15 . Regulatory information

### United States

**HCS Classification** : Flammable liquid  
Irritating material  
Carcinogen

### Canada

**WHMIS (Canada)** : Class B-2: Flammable liquid  
Class D-2A: Material causing other toxic effects (Very toxic).  
Class D-2B: Material causing other toxic effects (Toxic).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

### International regulations

**Canada inventory** : All components are listed or exempted.

**United States inventory (TSCA 8b)** : All components are listed or exempted.

**Europe inventory** : All components are listed or exempted.

## 16 . Other information

**Label requirements** : FLAMMABLE LIQUID AND VAPOUR. CAUSES RESPIRATORY TRACT, EYE AND SKIN IRRITATION. CANCER HAZARD - CONTAINS MATERIAL WHICH CAN CAUSE CANCER. CONTAINS MATERIAL WHICH CAN CAUSE HERITABLE GENETIC EFFECTS.


**Hazardous Material Information System (U.S.A.)** :

Health	*	2
Flammability		3
Physical hazards		0
Personal protection	H	



## 16 . Other information

National Fire Protection :  
Association (U.S.A.)

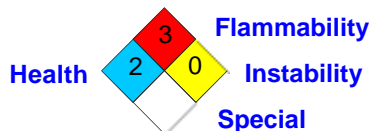

References : Available upon request.  
™ Trademark of Suncor Energy Inc. Used under licence.

Date of printing : 4/21/2010.

Date of issue : 9 April 2010

Date of previous issue : No previous validation.

Responsible name : Product Safety - RS

Indicates information that has changed from previously issued version.

For Copy of (M)SDS : Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

### Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

# Material Safety Data Sheet

JET A/A-1 AVIATION TURBINE FUEL



## 1 . Product and company identification

<b>Product name</b>	: JET A/A-1 AVIATION TURBINE FUEL
<b>Synonym</b>	: Jet A-1; Jet A-1-DI; Aviation Turbine Kerosene (ATK); JP-8; NATO F-34; Jet F-34; Turbine Fuel, Aviation, Kerosene Type (CAN/CGSB-3.32)
<b>Code</b>	: W213, SAP: 149
<b>Material uses</b>	: Used as aviation turbine fuel. May contain a fuel system icing inhibitor. In the arctic, Jet A-1 may also be used as diesel fuel and heating oil.
<b>Manufacturer</b>	: PETRO-CANADA P.O. Box 2844 150 -6th Avenue South-West Calgary, Alberta T2P 3E3
<b><u>In case of emergency</u></b>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

## 2 . Hazards identification

<b>Physical state</b>	: Clear liquid.
<b>Odour</b>	: Kerosene-like.
<b>WHMIS (Canada)</b>	:



Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).

Class D-2A: Material causing other toxic effects (Very toxic).

**The WHMIS classification of Jet A/A-1 is B3.**

**The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A.**

<b>OSHA/HCS status</b>	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
<b>Emergency overview</b>	: COMBUSTIBLE LIQUID AND VAPOUR. MAY CAUSE EYE AND SKIN IRRITATION. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA.  Combustible liquid. Slightly irritating to the eyes and skin. Keep away from heat, sparks and flame. Avoid exposure - obtain special instructions before use. Do not breathe vapour or mist. Avoid contact with eyes, skin and clothing. Contains material which may cause birth defects, based on animal data. Avoid exposure during pregnancy. Use only with adequate ventilation. Wash thoroughly after handling.
<b>Routes of entry</b>	: Dermal contact. Eye contact. Inhalation. Ingestion.
<b><u>Potential acute health effects</u></b>	
<b>Inhalation</b>	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
<b>Ingestion</b>	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
<b>Skin</b>	: Slightly irritating to the skin.
<b>Eyes</b>	: Slightly irritating to the eyes.
<b><u>Potential chronic health effects</u></b>	
<b>Chronic effects</b>	: No known significant effects or critical hazards.
<b>Carcinogenicity</b>	: No known significant effects or critical hazards.
<b>Mutagenicity</b>	: No known significant effects or critical hazards.

## 2 . Hazards identification

<b>Teratogenicity</b>	: Contains material which may cause birth defects, based on animal data.
<b>Developmental effects</b>	: No known significant effects or critical hazards.
<b>Fertility effects</b>	: No known significant effects or critical hazards.
<b>Medical conditions aggravated by over-exposure</b>	: Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

## 3 . Composition/information on ingredients

### Name

Complex mixture of petroleum hydrocarbons (C9-C16)*(Kerosene)	8008-20-6	99.9
Fuel System Icing Inhibitor (FSII) (if added**): (Diethylene Glycol Monomethyl Ether)	<u>CAS number</u>	<u>%</u>
Anti-static, antioxidant and metal deactivator additives	111-77-3	0.1
*Aromatic content is 25% maximum (benzene: nil).	Not applicable	<0.1
**Please note that Jet A-1-DI, JP-8, Jet F-34 and NATO F-34 all contain Fuel System Icing Inhibitor.		

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

## 4 . First-aid measures

<b>Eye contact</b>	: Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
<b>Skin contact</b>	: In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
<b>Inhalation</b>	: Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
<b>Ingestion</b>	: Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
<b>Protection of first-aiders</b>	: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.
<b>Notes to physician</b>	: No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

## 5 . Fire-fighting measures

**Flammability of the product** : Class II - combustible liquid (NFPA).

### Extinguishing media

<b>Suitable</b>	: Use dry chemical, CO <sub>2</sub> , water spray (fog) or foam.
<b>Not suitable</b>	: Do not use water jet.
<b>Special exposure hazards</b>	: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
<b>Products of combustion</b>	: Carbon oxides (CO, CO <sub>2</sub> ), nitrogen oxides (NO <sub>x</sub> ), sulphur oxides (SO <sub>x</sub> ), smoke and irritating vapours as products of incomplete combustion.

## 5 . Fire-fighting measures

### Special protective equipment for fire-fighters

: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

### Special remarks on fire hazards

: Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.

### Special remarks on explosion hazards

: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire.

## 6 . Accidental release measures

### Personal precautions

: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).

### Environmental precautions

: Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

### Methods for cleaning up

#### Small spill

: Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.

#### Large spill

: Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

## 7 . Handling and storage

### Handling

: Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Avoid exposure during pregnancy. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.

### Storage

: Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.



## 8 . Exposure controls/personal protection

### Ingredient

Kerosene

### Exposure limits

ACGIH TLV (United States).

TWA: 200 mg/m<sup>3</sup>

Consult local authorities for acceptable exposure limits.

### Recommended monitoring procedures

: If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

### Engineering measures

: Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

### Hygiene measures

: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

### Personal protection

#### Respiratory

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

#### Hands

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Recommended: polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

#### Eyes

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

#### Skin

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

#### Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

## 9 . Physical and chemical properties

### Physical state

Date of issue : 11/20/2009.

### Flash point

### Auto-ignition temperature

### Flammable limits

### Colour



: Clear liquid.

:

C

I

o

s

ed cup:  $\geq 38^{\circ}\text{C}$  ( $\geq 100.4^{\circ}\text{F}$ ) [Tag. Closed Cup]

:  $210^{\circ}\text{C}$  ( $410^{\circ}\text{F}$ )

: Lower: 0.7%

Upper: 5%

: Clear and colourless.

**Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)**

## 9 . Physical and chemical properties

<b>Odour</b>	: Kerosene-like.
<b>Odour threshold</b>	: Not available.
<b>pH</b>	: Not available.
<b>Boiling/condensation point</b>	: 140 to 300°C (284 to 572°F)
<b>Melting/freezing point</b>	: Not available.
<b>Relative density</b>	: 0.775 to 0.84 (Water=1)
<b>Vapour pressure</b>	: 0.7 kPa (5.25 mm Hg) @ 20°C (68°F).
<b>Vapour density</b>	: 4.5 [Air = 1]
<b>Volatility</b>	: Volatile.
<b>Evaporation rate</b>	: Not available.
<b>Viscosity</b>	: 1.0 - 1.9 cSt @ 40°C (104°F)
<b>Pour point</b>	: <-51°C (<-60°F)
<b>Solubility</b>	: Insoluble in water. Partially miscible in some alcohols. Miscible with other petroleum solvents.

## 10 . Stability and reactivity

<b>Chemical stability</b>	: The product is stable.
<b>Hazardous polymerisation</b>	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
<b>Materials to avoid</b>	: Reactive with oxidising agents, acids and alkalis.
<b>Hazardous decomposition products</b>	: May release COx, NOx, SOx, aldehydes, acids, ketones, smoke and irritating vapours when heated to decomposition.

## 11 . Toxicological information

### Acute toxicity

	<b>Result</b>	<b>Species</b>	<b>Dose</b>	<b>Exposure</b>
Kerosene	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>5000 mg/m <sup>3</sup>	4 hours
	Vapour			
Diethylene Glycol Dimonomethyl Ether	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	4000 mg/kg	-
	LC50 Inhalation	Rat	>50000 mg/m <sup>3</sup>	4 hours
	Vapour			

**Conclusion/Summary** : Not available.

### Chronic toxicity

**Conclusion/Summary** : Not available.

### Irritation/Corrosion

**Conclusion/Summary** : Not available.

### Sensitiser

**Conclusion/Summary** : Not available.

### Carcinogenicity

**Conclusion/Summary** : Not available.

### Classification

<b>Product/ingredient name</b>	<b>ACGIH</b>	<b>IARC</b>	<b>EPA</b>	<b>NIOSH</b>	<b>NTP</b>	<b>OSHA</b>
Kerosene	A3	3	-	-	-	-

### Mutagenicity

**Conclusion/Summary** : Not available.

### Teratogenicity

**Conclusion/Summary** : Not available.



## 11 . Toxicological information

### Reproductive toxicity

**Conclusion/Summary** : Not available.

## 12 . Ecological information

**Environmental effects** : No known significant effects or critical hazards.

### Aquatic ecotoxicity

**Conclusion/Summary** : Not available.

### Biodegradability

**Conclusion/Summary** : Not available.


## 13 . Disposal considerations

**Waste disposal** : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

## 14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG* Label	Additional information
<b>TDG Classification</b>	UN1863	FUEL, AVIATION, TURBINE ENGINE	3	III 	-
<b>DOT Classification</b>	Not available.	Not available.	Not available.	-	-

PG\* : Packing group

## 15 . Regulatory information

### United States

**HCS Classification** : Combustible liquid

### Canada

**WHMIS (Canada)** : Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).  
Class D-2A: Material causing other toxic effects (Very toxic).

The WHMIS classification of Jet A/A-1 is B3.

The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

### International regulations

**Canada inventory** : All components are listed or exempted.

**United States inventory (TSCA 8b)** : All components are listed or exempted.

**Europe inventory** : All components are listed or exempted.

## 16 . Other information

**Label requirements** : COMBUSTIBLE LIQUID AND VAPOUR. MAY CAUSE EYE AND SKIN IRRITATION. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA.

**Hazardous Material Information System (U.S.A.)** :

Health	*	2
Flammability		2
Physical hazards		0
Personal protection	H	

**National Fire Protection Association (U.S.A.)** :



**References**

: Available upon request.

TM/MC Marque de commerce de Petro-Canada - Trademark

**Date of printing**

: 11/20/2009.

**Date of issue**

: 20 November 2009

**Date of previous issue**

: No previous validation.

**Responsible name**

: Product Safety - DSR

Indicates information that has changed from previously issued version.

**For Copy of (M)SDS**

: Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

### Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

# Material Safety Data Sheet

SNOWMOBILE MOTOR OIL



## 1 . Product and company identification

<b>Product name</b>	: SNOWMOBILE MOTOR OIL
<b>Code</b>	: PSNOL, 460-401-8
<b>Material uses</b>	: Low ash engine oil specifically designed to lubricate two-cycle snowmobile engines.
<b>Manufacturer</b>	: Petro-Canada Lubricants Inc. 2310 Lakeshore Road West Mississauga, Ontario Canada L5J 1K2
<b><u>In case of emergency</u></b>	: Suncor Energy: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

## 2 . Hazards identification

<b>Physical state</b>	: Viscous liquid.
<b>Odour</b>	: Mild petroleum oil like.
<b>WHMIS (Canada)</b>	: Not controlled under WHMIS (Canada).
<b>OSHA/HCS status</b>	: While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this MSDS contains valuable information critical to the safe handling and proper use of the product. This MSDS should be retained and available for employees and other users of this product.
<b>Emergency overview</b>	: No specific hazard.
<b>Routes of entry</b>	: Dermal contact. Eye contact. Inhalation. Ingestion.
<b><u>Potential acute health effects</u></b>	
<b>Inhalation</b>	: No known significant effects or critical hazards.
<b>Ingestion</b>	: No known significant effects or critical hazards.
<b>Skin</b>	: Slightly irritating to the skin.
<b>Eyes</b>	: Slightly irritating to the eyes.
<b><u>Potential chronic health effects</u></b>	
<b>Chronic effects</b>	: No known significant effects or critical hazards.
<b>Carcinogenicity</b>	: Not listed as carcinogenic by OSHA, NTP or IARC.
<b>Mutagenicity</b>	: No known significant effects or critical hazards.
<b>Teratogenicity</b>	: No known significant effects or critical hazards.
<b>Developmental effects</b>	: No known significant effects or critical hazards.
<b>Fertility effects</b>	: No known significant effects or critical hazards.
<b>Medical conditions aggravated by over-exposure</b>	: Repeated or prolonged contact with spray or mist may produce chronic eye irritation and severe skin irritation. Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

## 3 . Composition/information on ingredients

<b><u>Name</u></b>	<b><u>CAS number</u></b>	<b><u>%</u></b>
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	Mixture	-

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

The base oil may be a mixture of the following CAS#s: 8042-47-5, 64741-95-3, 64742-01-4, 64742-46-7, 64742-47-8, 64742-53-6, 64742-54-7, 64742-55-8, 64742-62-7, 72623-83-7, 72623-84-8, 72623-85-9, 72623-86-0, 72623-87-1, 178603-64-0, 178603-65-1, 178603-66-2, 445411-73-4

### 3 . Composition/information on ingredients

### 4 . First-aid measures

<b>Eye contact</b>	: Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
<b>Skin contact</b>	: In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
<b>Inhalation</b>	: Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
<b>Ingestion</b>	: Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
<b>Protection of first-aiders</b>	: No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
<b>Notes to physician</b>	: No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

### 5 . Fire-fighting measures

**Flammability of the product** : May be combustible at high temperature.

#### Extinguishing media

<b>Suitable</b>	: Use an extinguishing agent suitable for the surrounding fire.
<b>Not suitable</b>	: None known.
<b>Special exposure hazards</b>	: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.
<b>Products of combustion</b>	: Carbon oxides (CO, CO <sub>2</sub> ), nitrogen oxides (NO <sub>x</sub> ), sulphur oxides (SO <sub>x</sub> ), hydrocarbons, smoke and irritating vapours as products of incomplete combustion.
<b>Special protective equipment for fire-fighters</b>	: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
<b>Special remarks on fire hazards</b>	: Low fire hazard. This material must be heated before ignition will occur.
<b>Special remarks on explosion hazards</b>	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

### 6 . Accidental release measures

<b>Personal precautions</b>	: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
<b>Environmental precautions</b>	: Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
<b><u>Methods for cleaning up</u></b>	
<b>Small spill</b>	: Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.

## 6 . Accidental release measures

- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

## 7 . Handling and storage

- Handling** : Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapour or mist. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination.

## 8 . Exposure controls/personal protection

### **Ingredient**

Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).

### **Exposure limits**

**ACGIH TLV (United States). Notes: (oil mist)**

TWA: 5 mg/m<sup>3</sup> 8 hour(s).

STEL: 10 mg/m<sup>3</sup> 15 minute(s).

**Consult local authorities for acceptable exposure limits.**

- Recommended monitoring procedures** : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.
- Engineering measures** : No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants. If this product contains ingredients with exposure limits, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure below any recommended or statutory limits.
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Personal protection**
- Respiratory** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapour filter
- Hands** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.  
Recommended: neoprene, nitrile, polyvinyl alcohol (PVA), Viton.
- Eyes** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.



## 8 . Exposure controls/personal protection

- Skin** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

## 9 . Physical and chemical properties

- Physical state** : Viscous liquid.
- Flash point** : Open cup: 152°C (305.6°F) [Cleveland.]
- Auto-ignition temperature** : Not available.
- Flammable limits** : Not available.
- Colour** : Blue-green.
- Odour** : Mild petroleum oil like.
- Odour threshold** : Not available.
- pH** : Not available.
- Boiling/condensation point** : Not available.
- Melting/freezing point** : Not available.
- Relative density** : 0.88 kg/L @ 15°C (59°F)
- Vapour pressure** : Not available.
- Vapour density** : Not available.
- Volatility** : Not available.
- Evaporation rate** : Not available.
- Viscosity** : 20.9 cSt @ 40°C (104°F), 4.5 cSt @ 100°C (212°F), VI=132
- Pour point** : -57°C (-71°F)
- Solubility** : Insoluble in water.

## 10 . Stability and reactivity

- Chemical stability** : The product is stable.
- Hazardous polymerisation** : Under normal conditions of storage and use, hazardous polymerisation will not occur.
- Materials to avoid** : Reactive with oxidising agents, reducing agents and acids.
- Hazardous decomposition products** : May release COx, NOx, SOx, aldehydes, methacrylate monomers, hydrocarbons, smoke and irritating vapours when heated to decomposition.

## 11 . Toxicological information

### Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>2500 mg/m <sup>3</sup>	4 hours
	Dusts and mists			

- Conclusion/Summary** : Not available.

### Chronic toxicity

- Conclusion/Summary** : Not available.

### Irritation/Corrosion

- Conclusion/Summary** : Not available.



## 11 . Toxicological information

### Sensitiser

Conclusion/Summary : Not available.

### Carcinogenicity

Conclusion/Summary : Not available.

### Mutagenicity

Conclusion/Summary : Not available.

### Teratogenicity

Conclusion/Summary : Not available.

### Reproductive toxicity

Conclusion/Summary : Not available.

## 12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

### Aquatic ecotoxicity

Conclusion/Summary : Not available.

### Biodegradability

Conclusion/Summary : Not available.

Other adverse effects : No known significant effects or critical hazards.

## 13 . Disposal considerations

**Waste disposal** : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

## 14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG* Label	Additional information
TDG Classification	Not regulated.	-	-	-	-
DOT Classification	Not available.	Not available.	Not available.	-	-

PG\* : Packing group

## 15 . Regulatory information

### United States

HCS Classification : Not regulated.

### Canada

WHMIS (Canada) : Not controlled under WHMIS (Canada).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

### EU regulations



## 15 . Regulatory information

**Risk phrases** : This product is not classified according to EU legislation.

### International regulations

**Canada inventory** : All components are listed or exempted.

**United States inventory** : All components are listed or exempted.

(TSCA 8b)


**Europe inventory** : All components are listed or exempted.

## 16 . Other information

**Hazardous Material  
Information System (U.S.A.)**

Health	1
Flammability	1
Physical hazards	0
Personal protection	B

**National Fire Protection  
Association (U.S.A.)**

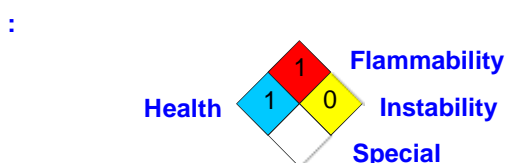

### **References**

: Available upon request.  
™ Trademark of Suncor Energy Inc. Used under licence.

**Date of printing** : 6/11/2010.

**Date of issue** : 11 June 2010

**Date of previous issue** : 4/9/2009.

**Responsible name** : Product Safety - DSR

Indicates information that has changed from previously issued version.

### **For Copy of (M)SDS**

: The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: [lubricants.petro-canada.ca/msds](http://lubricants.petro-canada.ca/msds)

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: 1-800-378-4518

Ontario & Central Canada, telephone: 1-800-268-5850; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285

For Product Safety Information: (905) 804-4752

### Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

## **APPENDIX C**

### **Immediately Reportable Spill Quantities**

## Immediately Reportable Spill Quantities

<b>TDG Class</b>	<b>Substance for NWT 24 Hour Spill Line</b>	<b>Immediately Reportable Quantities</b>
1 2.3 2.4 6.2 7 None	Explosives Compressed gas (toxic) Compressed gas (corrosive) Infectious substances Radioactive Unknown substance	Any amount
2.1 2.2	Compressed gas (flammable) Compressed gas (non-corrosive, non-flammable)	Any amount of gas from containers with a capacity greater than 100 L
3.1 3.2 3.3	Flammable liquids	> 100 L
4.1 4.2 4.3	Flammable solids Spontaneously combustible solids Water reactant	> 25 kg
5.1 9.1	Oxidizing substances Miscellaneous products or substances excluding PCB mixtures	> 50 L or 50 kg
5.2 9.2	Organic peroxides Environmentally hazardous	> 1 L or 1 kg
6.1 8 9.3	Poisonous substances Corrosive substances Dangerous wastes	> 5 L or 5 kg
9.1	PCB mixtures of 5 or more ppm	> 0.5 L or 0.5 kg
None	Other contaminants (e.g. crude oil, drilling fluid, produced water, waste or spent chemicals, used or waste oil, vehicle fluids, waste water, etc.)	> 100 L or 100 kg
None	Sour natural gas (i.e. contains H <sub>2</sub> S) Sweet natural gas	Uncontrolled release or sustained flow of 10 minutes or more

In addition, all releases of harmful substances, regardless of quantity, are to be reported to the NWT spill line if the release is near or into a water body, is near or into a designated sensitive environment or sensitive wildlife habitat, poses imminent threat to human health or safety, poses imminent threat to a listed species at risk or its critical habitat, or is uncontrollable.